
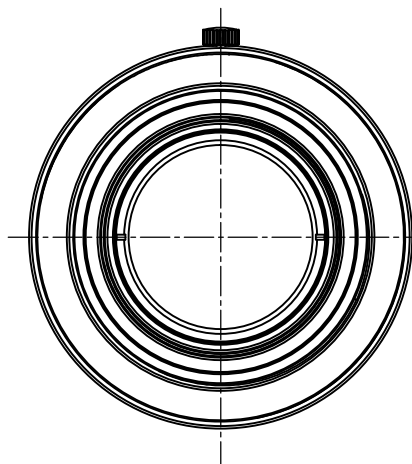
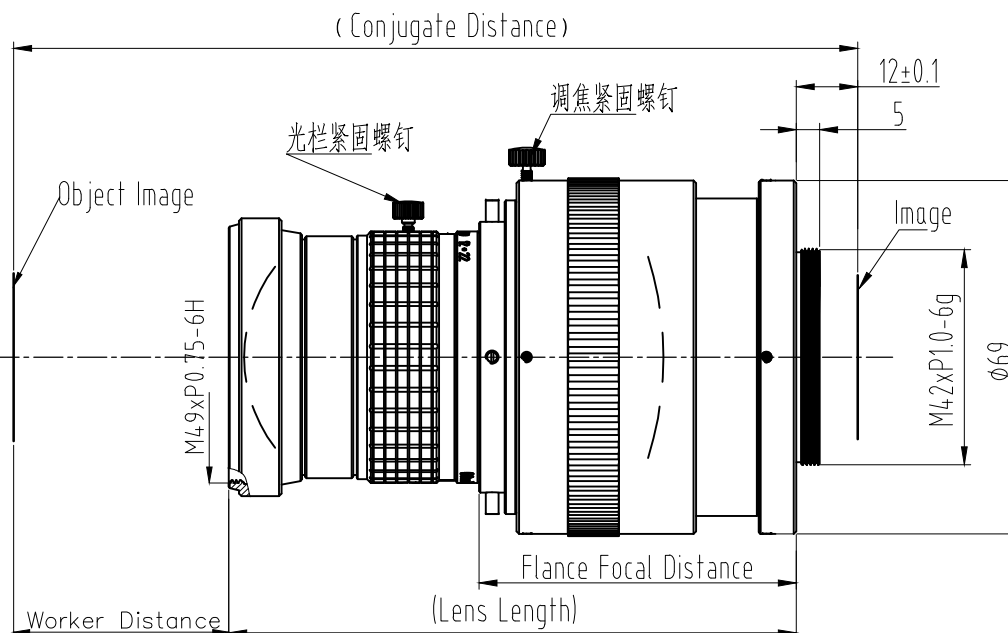




D					倍率 (β)	共轭距 (V0)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ60 视场					
					0.075x	955.2	834	109.2	576.9	760.0	800.0					
					0.08x	901.5	780	109.5	540.9	712.5	750.0					
					0.085x	859.8	738	109.8	509.1	670.6	705.9					
Main Specification																
Magnification		-0.075x	-0.1x	-0.16x	0.09x	821.1	699	110.1	480.8	633.3	666.7					
Working Distance		834±5	630±5	405±5	0.095x	785.4	663	110.4	455.5	600.0	631.6					
Image Distance		36.3±2.5	37.8±2.5	41.4±2.5	0.1x	752.7	630	110.7	432.7	570.0	600.0					
E	Conjugate Distance		955.2±9	752.7±9	531.3±9	0.11x	698.3	575	111.3	393.4	518.2	545.5				
						0.12x	653.9	530	111.9	360.6	475.0	500.0				
						0.13x	616.5	492	112.5	332.8	438.5	461.5				
						0.14x	583.1	458	113.1	309.1	407.1	428.6				
	Max image		ø62			0.15x	555.7	430	113.7	288.5	380.0	400.0				
	F/#		4.5~22			0.16x	531.3	405	114.6	270.4	356.3	375.0				
	EFL		60							TOLERANCE:			材料(环保)	单位	比例	
	FOV		50.1°							LINEARITY TOLERANCES ±0.05						
	ENP Diameter		13.3							ANGULAR TOLERANCES ARE ±30°						
	F	Distortion		0.05%							DRAFT ANGLES AREA ±0.5°/SIDE		名称	LS16010A规格书	页码	
Structure		12G							设计		CHKP	2024-04-28				
IMAGE QUALITY														版本		
AXIS		ø28	ø43	ø56			##	##	##	审核			代号		LS16010A-M42-SPEC	
250lp/mm		200lp/mm	160lp/mm	160lp/mm	标记	处数	更改文件号	担当	变更日期	批准						