


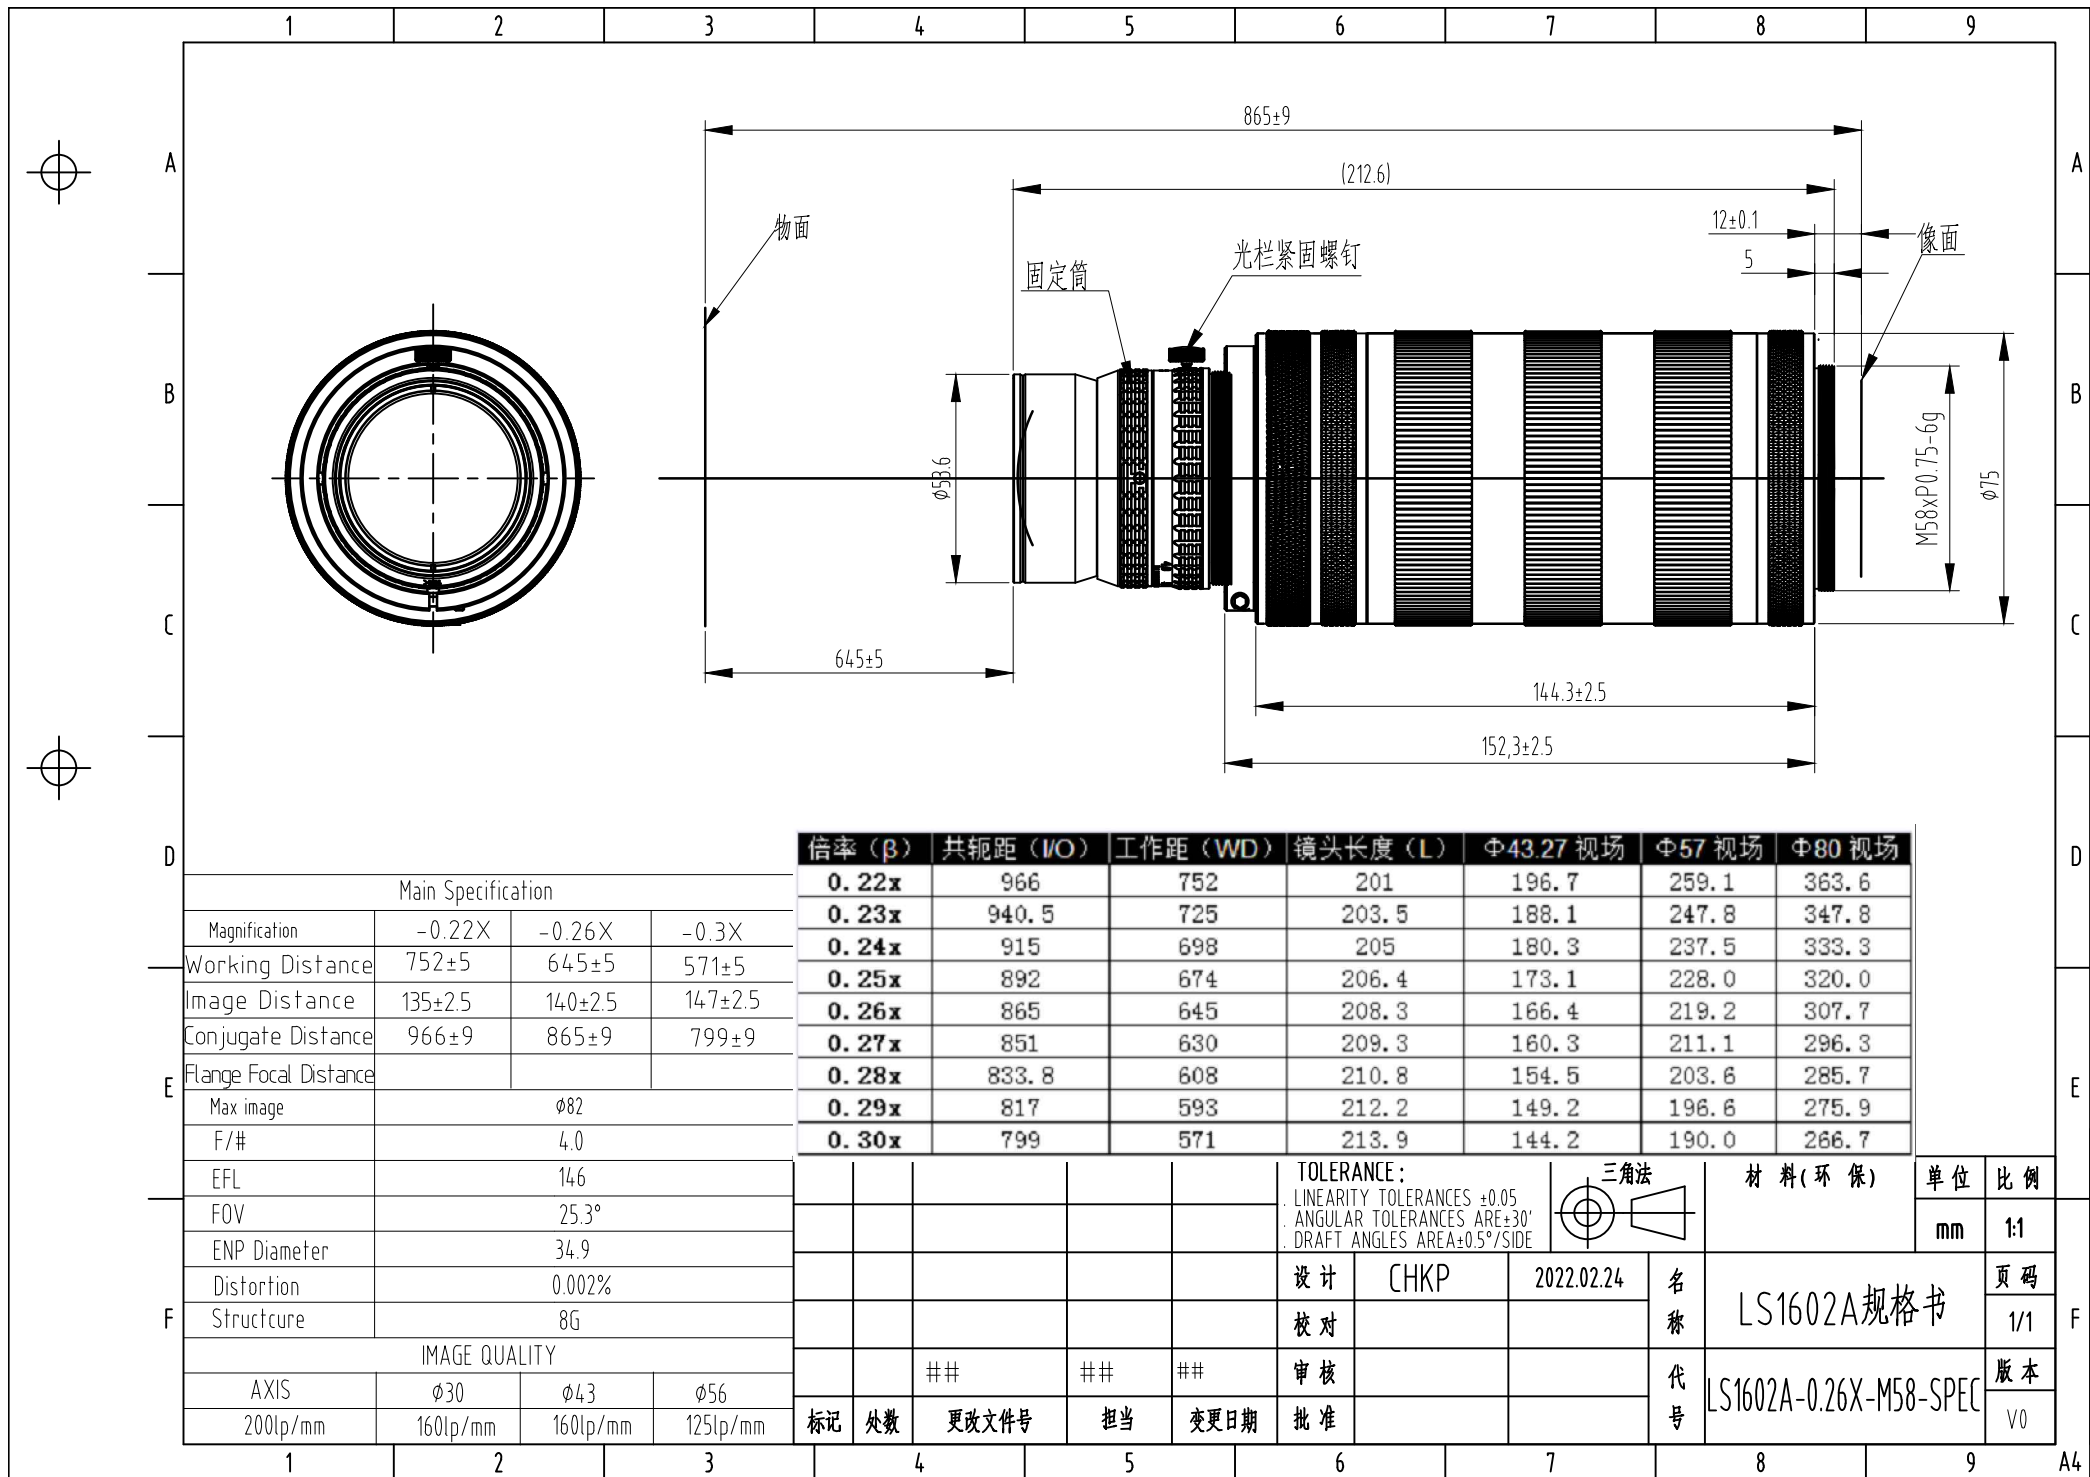

Main Specification				倍率 (β)	共轭距 (WO)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ80 视场
Magnification	-0.22X	-0.26X	-0.3X	0.22x	966	752	201	196.7	259.1	363.6
Working Distance	752±5	645±5	571±5	0.23x	940.5	725	203.5	188.1	247.8	347.8
Image Distance	135±2.5	140±2.5	147±2.5	0.24x	915	698	205	180.3	237.5	333.3
Conjugate Distance	966±9	865±9	799±9	0.25x	892	674	206.4	173.1	228.0	320.0
Flange Focal Distance				0.26x	865	645	208.3	166.4	219.2	307.7
Max image		Φ82		0.27x	851	630	209.3	160.3	211.1	296.3
F/#		4.0		0.28x	833.8	608	210.8	154.5	203.6	285.7
EFL		146		0.29x	817	593	212.2	149.2	196.6	275.9
FOV		25.3°		0.30x	799	571	213.9	144.2	190.0	266.7
ENP Diameter		34.9								
Distortion		0.002%								
Structure		8G								
IMAGE QUALITY										
AXIS	Φ30	Φ43	Φ56							
200lp/mm	160lp/mm	160lp/mm	125lp/mm							

信率 (β)	共轭距 (WO)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ80 视场
0.22x	966	752	201	196.7	259.1	363.6
0.23x	940.5	725	203.5	188.1	247.8	347.8
0.24x	915	698	205	180.3	237.5	333.3
0.25x	892	674	206.4	173.1	228.0	320.0
0.26x	865	645	208.3	166.4	219.2	307.7
0.27x	851	630	209.3	160.3	211.1	296.3
0.28x	833.8	608	210.8	154.5	203.6	285.7
0.29x	817	593	212.2	149.2	196.6	275.9
0.30x	799	571	213.9	144.2	190.0	266.7

TOLERANCE:	三角法	材料 (环保)	单位	比例
LINEARITY TOLERANCES ±0.05	Φ		mm	1:1
ANGULAR TOLERANCES ARE ±30°				
DRAFT ANGLES AREA ±0.5°/SIDE				

设计	CHKP	2022.02.24	名称	LS1602A规格书	页码
校对			代号	LS1602A-0.26X-M58-SPEC	1/1
审核					版本
批准					V0

标记	处数	更改文件号	担当	变更日期	批准
----	----	-------	----	------	----