
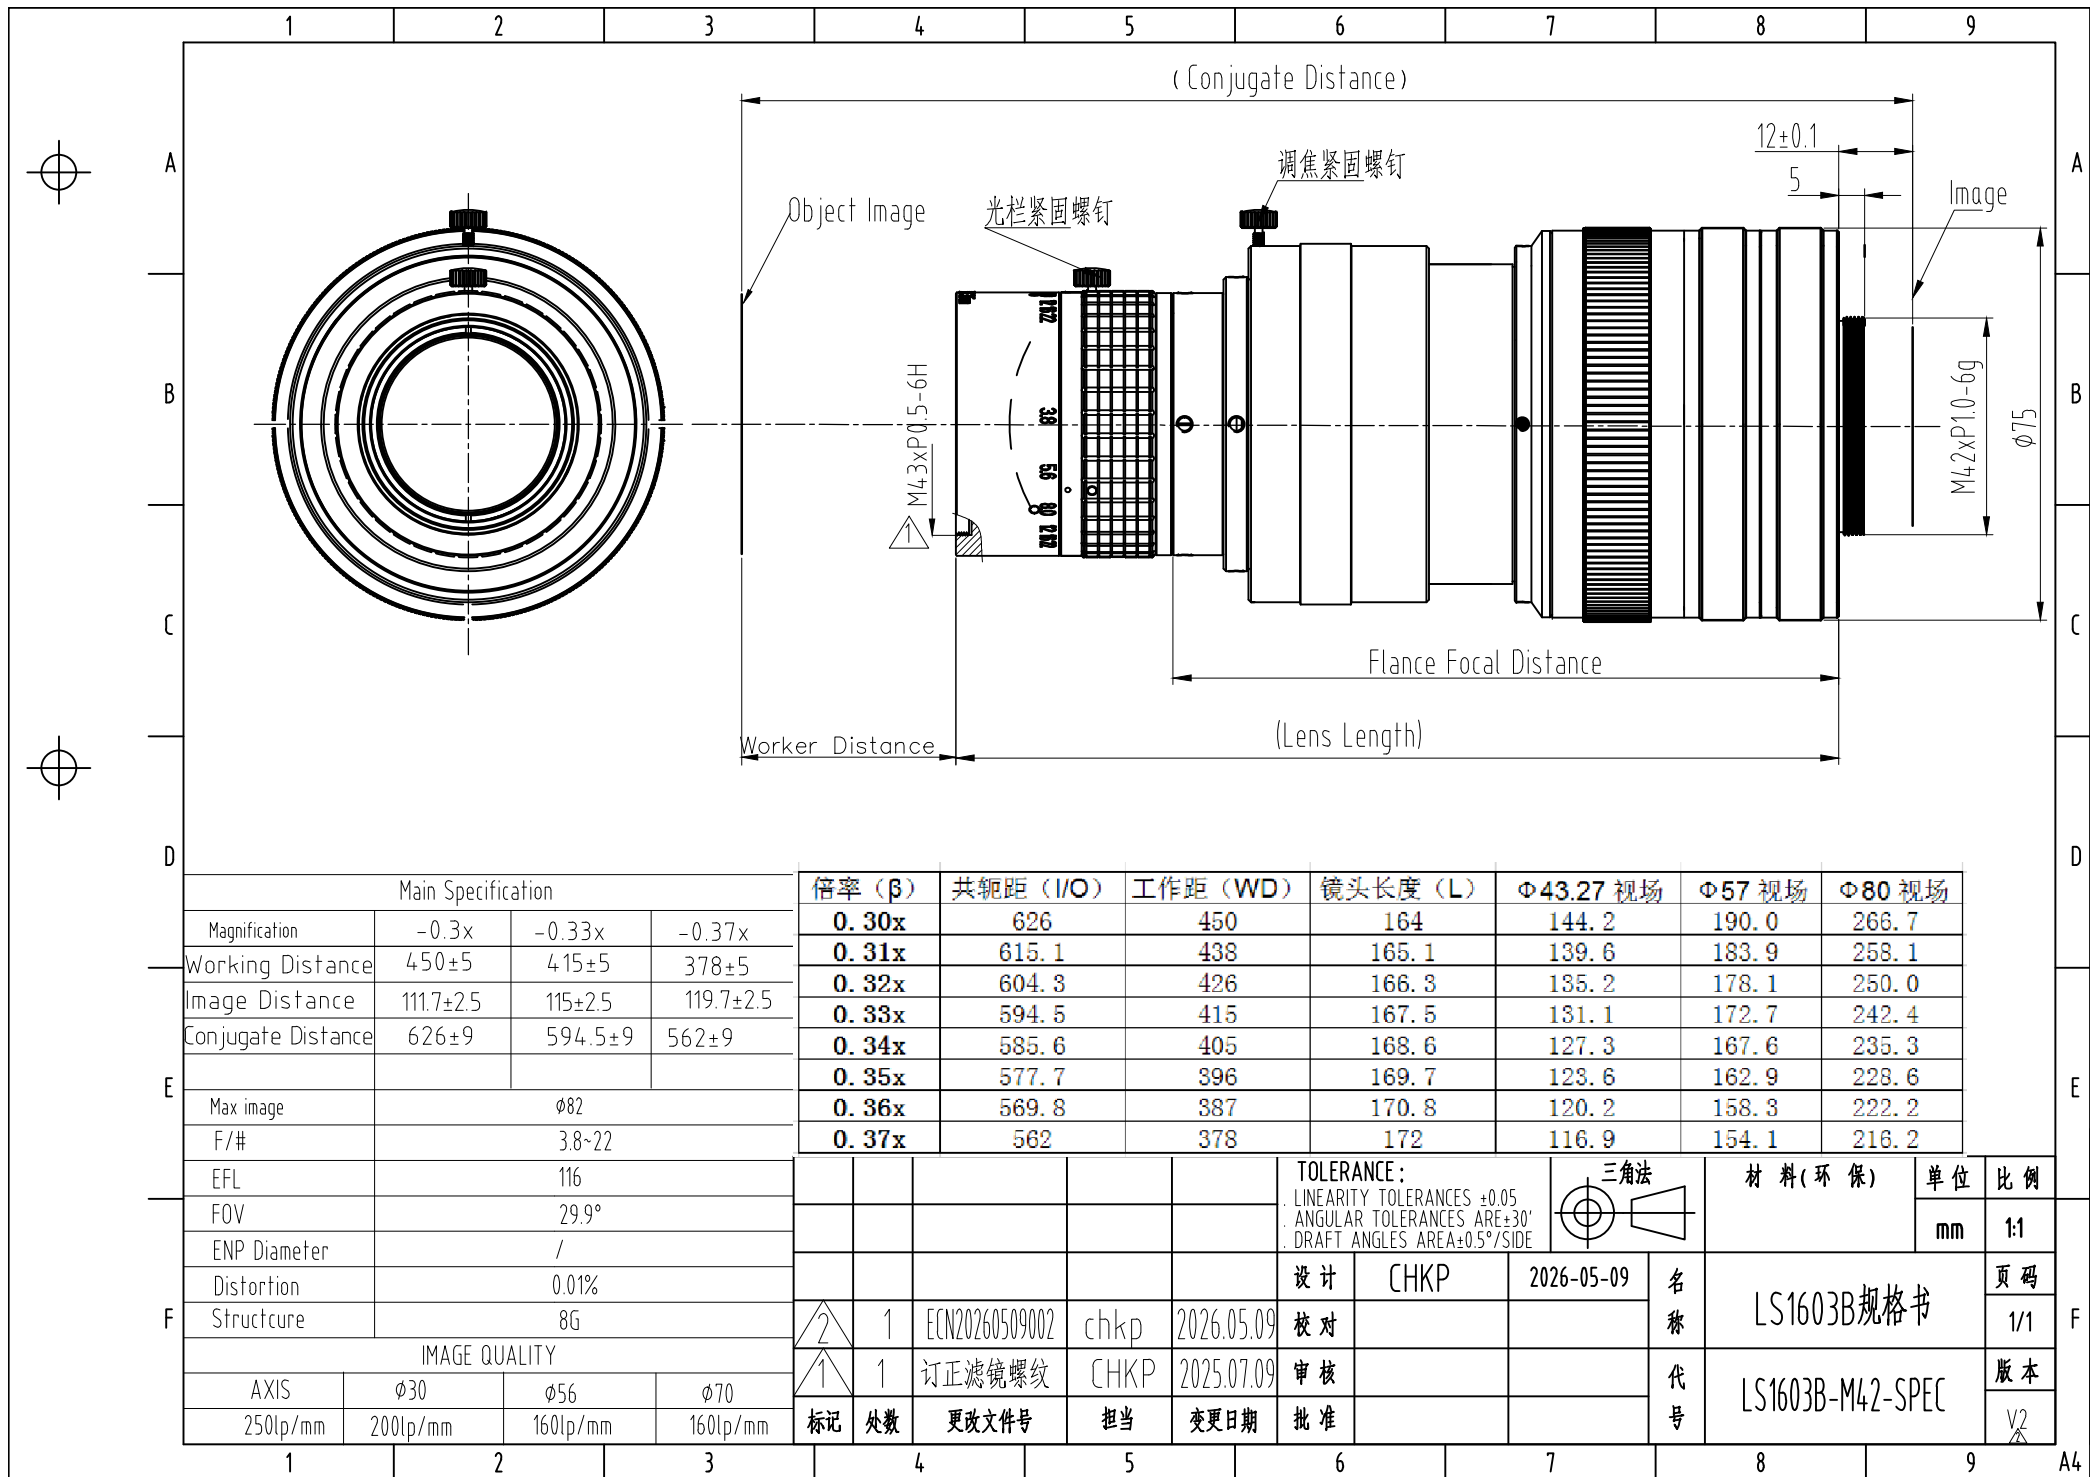




Main Specification				倍率 (β)	共轭距 (I/O)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ80 视场		
Magnification	-0.3x	-0.33x	-0.37x	0.30x	626	450	164	144.2	190.0	266.7		
Working Distance	450±5	415±5	378±5	0.31x	615.1	438	165.1	139.6	183.9	258.1		
Image Distance	111.7±2.5	115±2.5	119.7±2.5	0.32x	604.3	426	166.3	135.2	178.1	250.0		
Conjugate Distance	626±9	594.5±9	562±9	0.33x	594.5	415	167.5	131.1	172.7	242.4		
				0.34x	585.6	405	168.6	127.3	167.6	235.3		
				0.35x	577.7	396	169.7	123.6	162.9	228.6		
Max image	ø82			0.36x	569.8	387	170.8	120.2	158.3	222.2		
F/#	3.8~22			0.37x	562	378	172	116.9	154.1	216.2		
EFL	116						TOLERANCE: LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE			材 料 (环 保)	单 位	比 例
FOV	29.9°											
ENP Diameter	/											
Distortion	0.01%						设 计	CHKP	2026-05-09	名 称	LS1603B规格书	页 码
Structure	8G				1	ECN20260509002	chkp	2026.05.09	校 对			
IMAGE QUALITY					1	订正滤镜螺纹	CHKP	2025.07.09	审 核	代 号	LS1603B-M42-SPEC	版 本
AXIS	ø30	ø56	ø70	标记	处数	更改文件号	担当	变更日期	批 准			
250lp/mm	200lp/mm	160lp/mm	160lp/mm									
A4												