


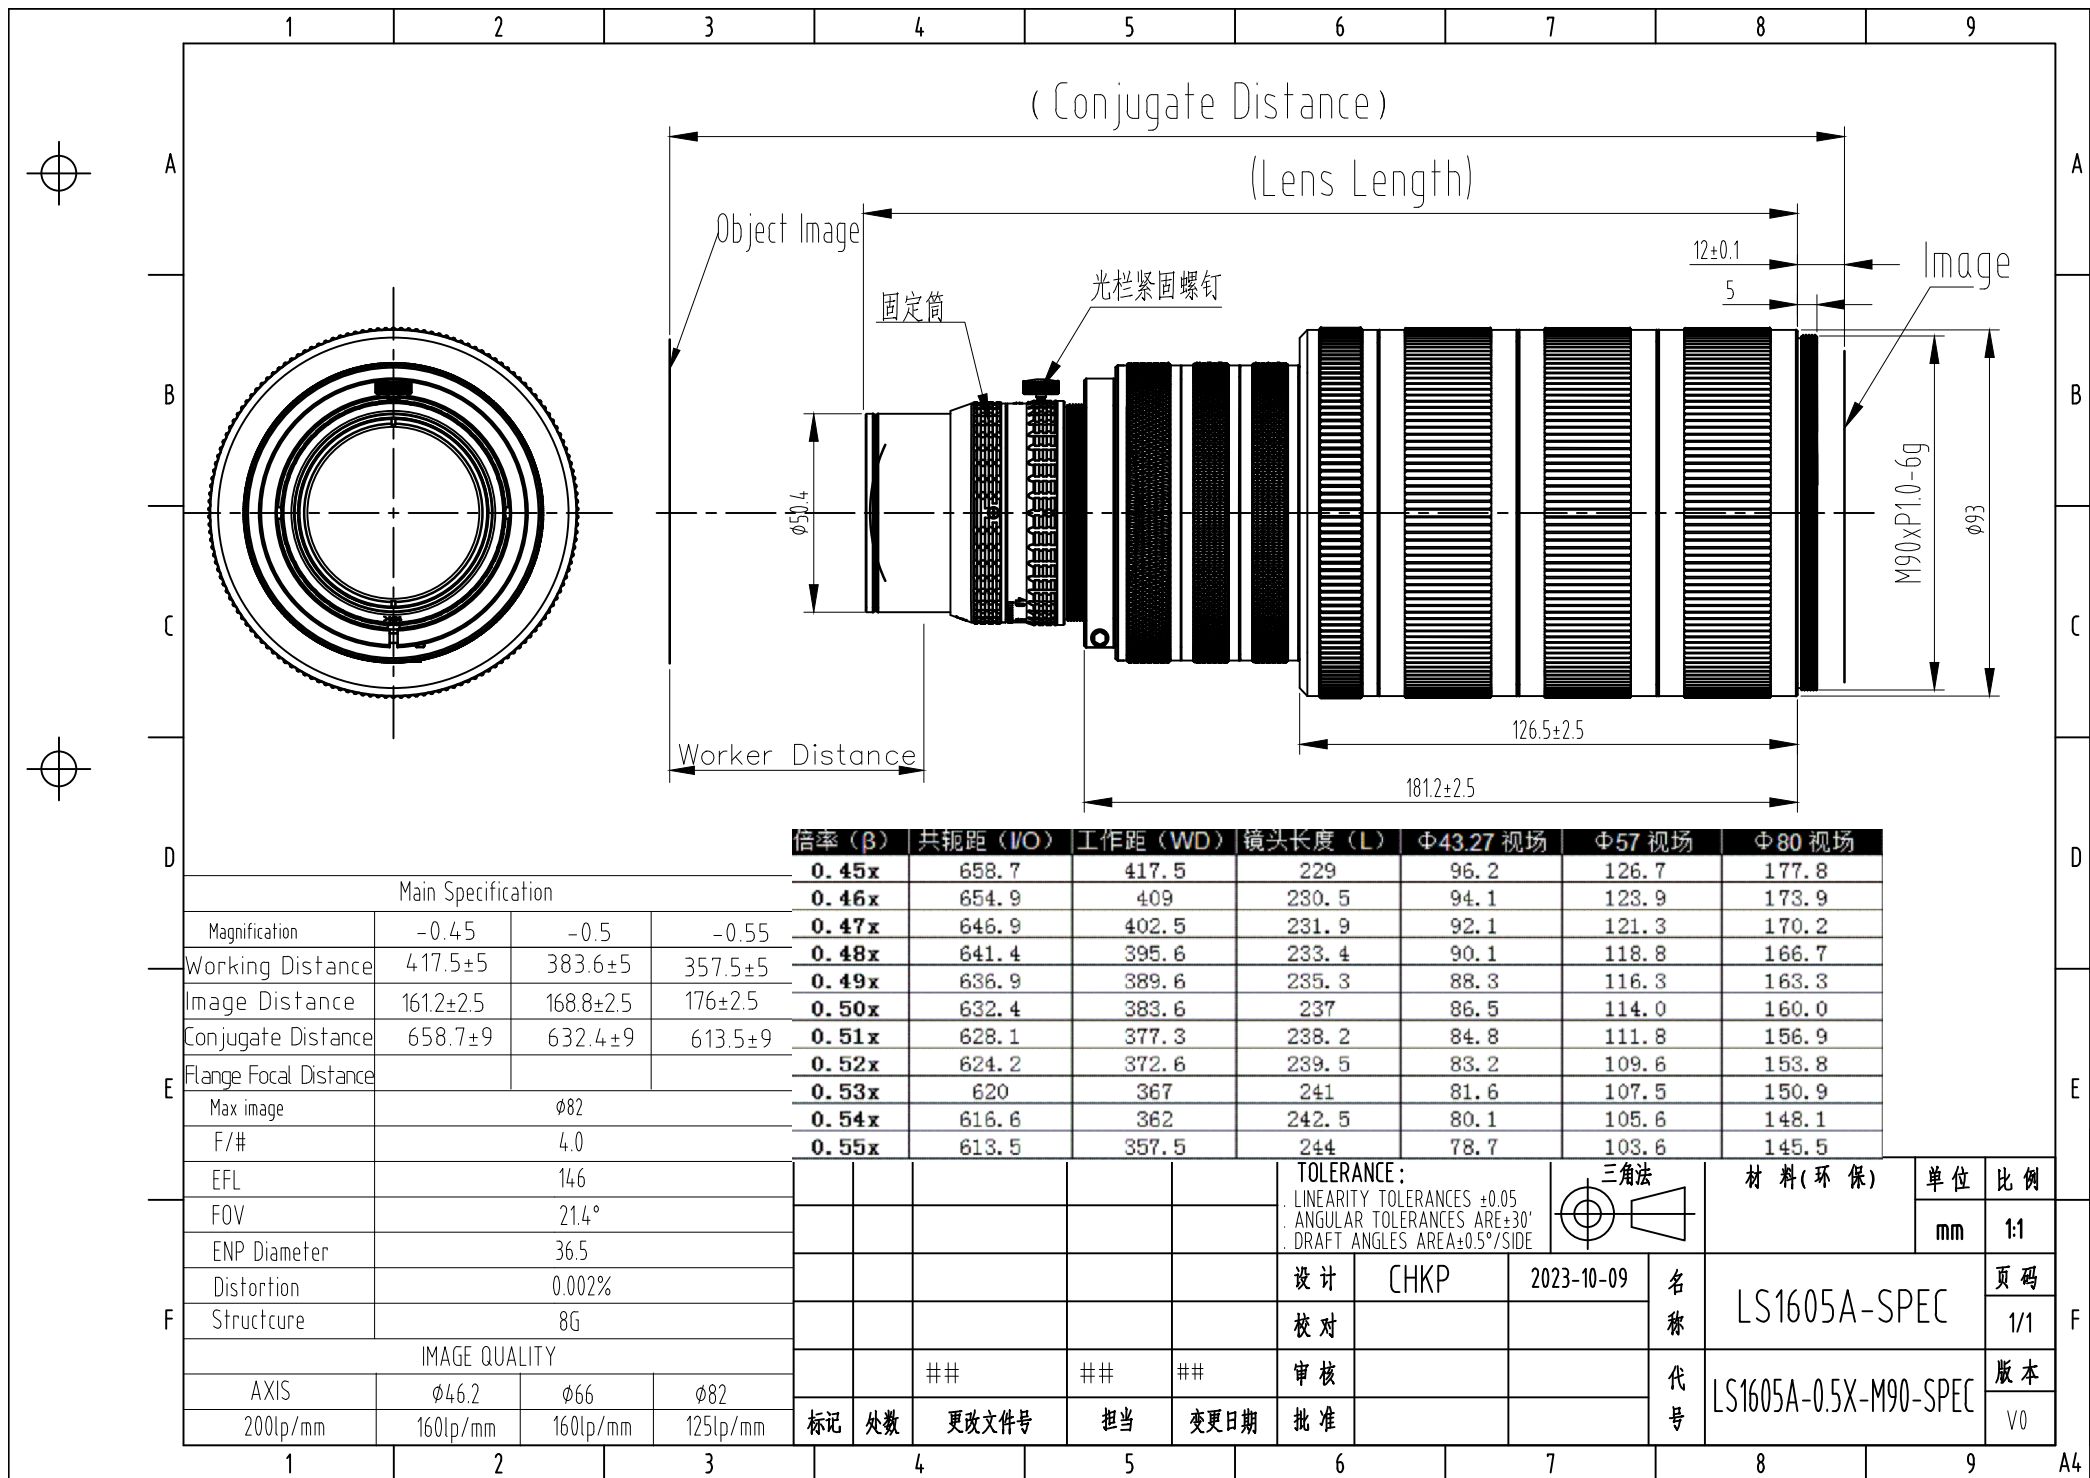

				倍率 (β)	共轭距 (VO)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ80 视场			
Main Specification				0.45x	658.7	417.5	229	96.2	126.7	177.8			
Magnification	-0.45	-0.5	-0.55	0.46x	654.9	409	230.5	94.1	123.9	173.9			
Working Distance	417.5±5	383.6±5	357.5±5	0.47x	646.9	402.5	231.9	92.1	121.3	170.2			
Image Distance	161.2±2.5	168.8±2.5	176±2.5	0.48x	641.4	395.6	233.4	90.1	118.8	166.7			
Conjugate Distance	658.7±9	632.4±9	613.5±9	0.49x	636.9	389.6	235.3	88.3	116.3	163.3			
Flange Focal Distance				0.50x	632.4	383.6	237	86.5	114.0	160.0			
Max image	ø82			0.51x	628.1	377.3	238.2	84.8	111.8	156.9			
F/#	4.0			0.52x	624.2	372.6	239.5	83.2	109.6	153.8			
EFL	146			0.53x	620	367	241	81.6	107.5	150.9			
FOV	21.4°			0.54x	616.6	362	242.5	80.1	105.6	148.1			
ENP Diameter	36.5			0.55x	613.5	357.5	244	78.7	103.6	145.5			
Distortion	0.002%			TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE						材料 (环保)			
Structure	8G												
IMAGE QUALITY								设计		CHKP	2023-10-09	名称	LS1605A-S
AXIS	ø46.2	ø66	ø82					校对					
200lp/mm	160lp/mm	160lp/mm	125lp/mm					审核				代号	LS1605A-0.5X-M
				标记	处数	更改文件号	担当	变更日期	批准				