


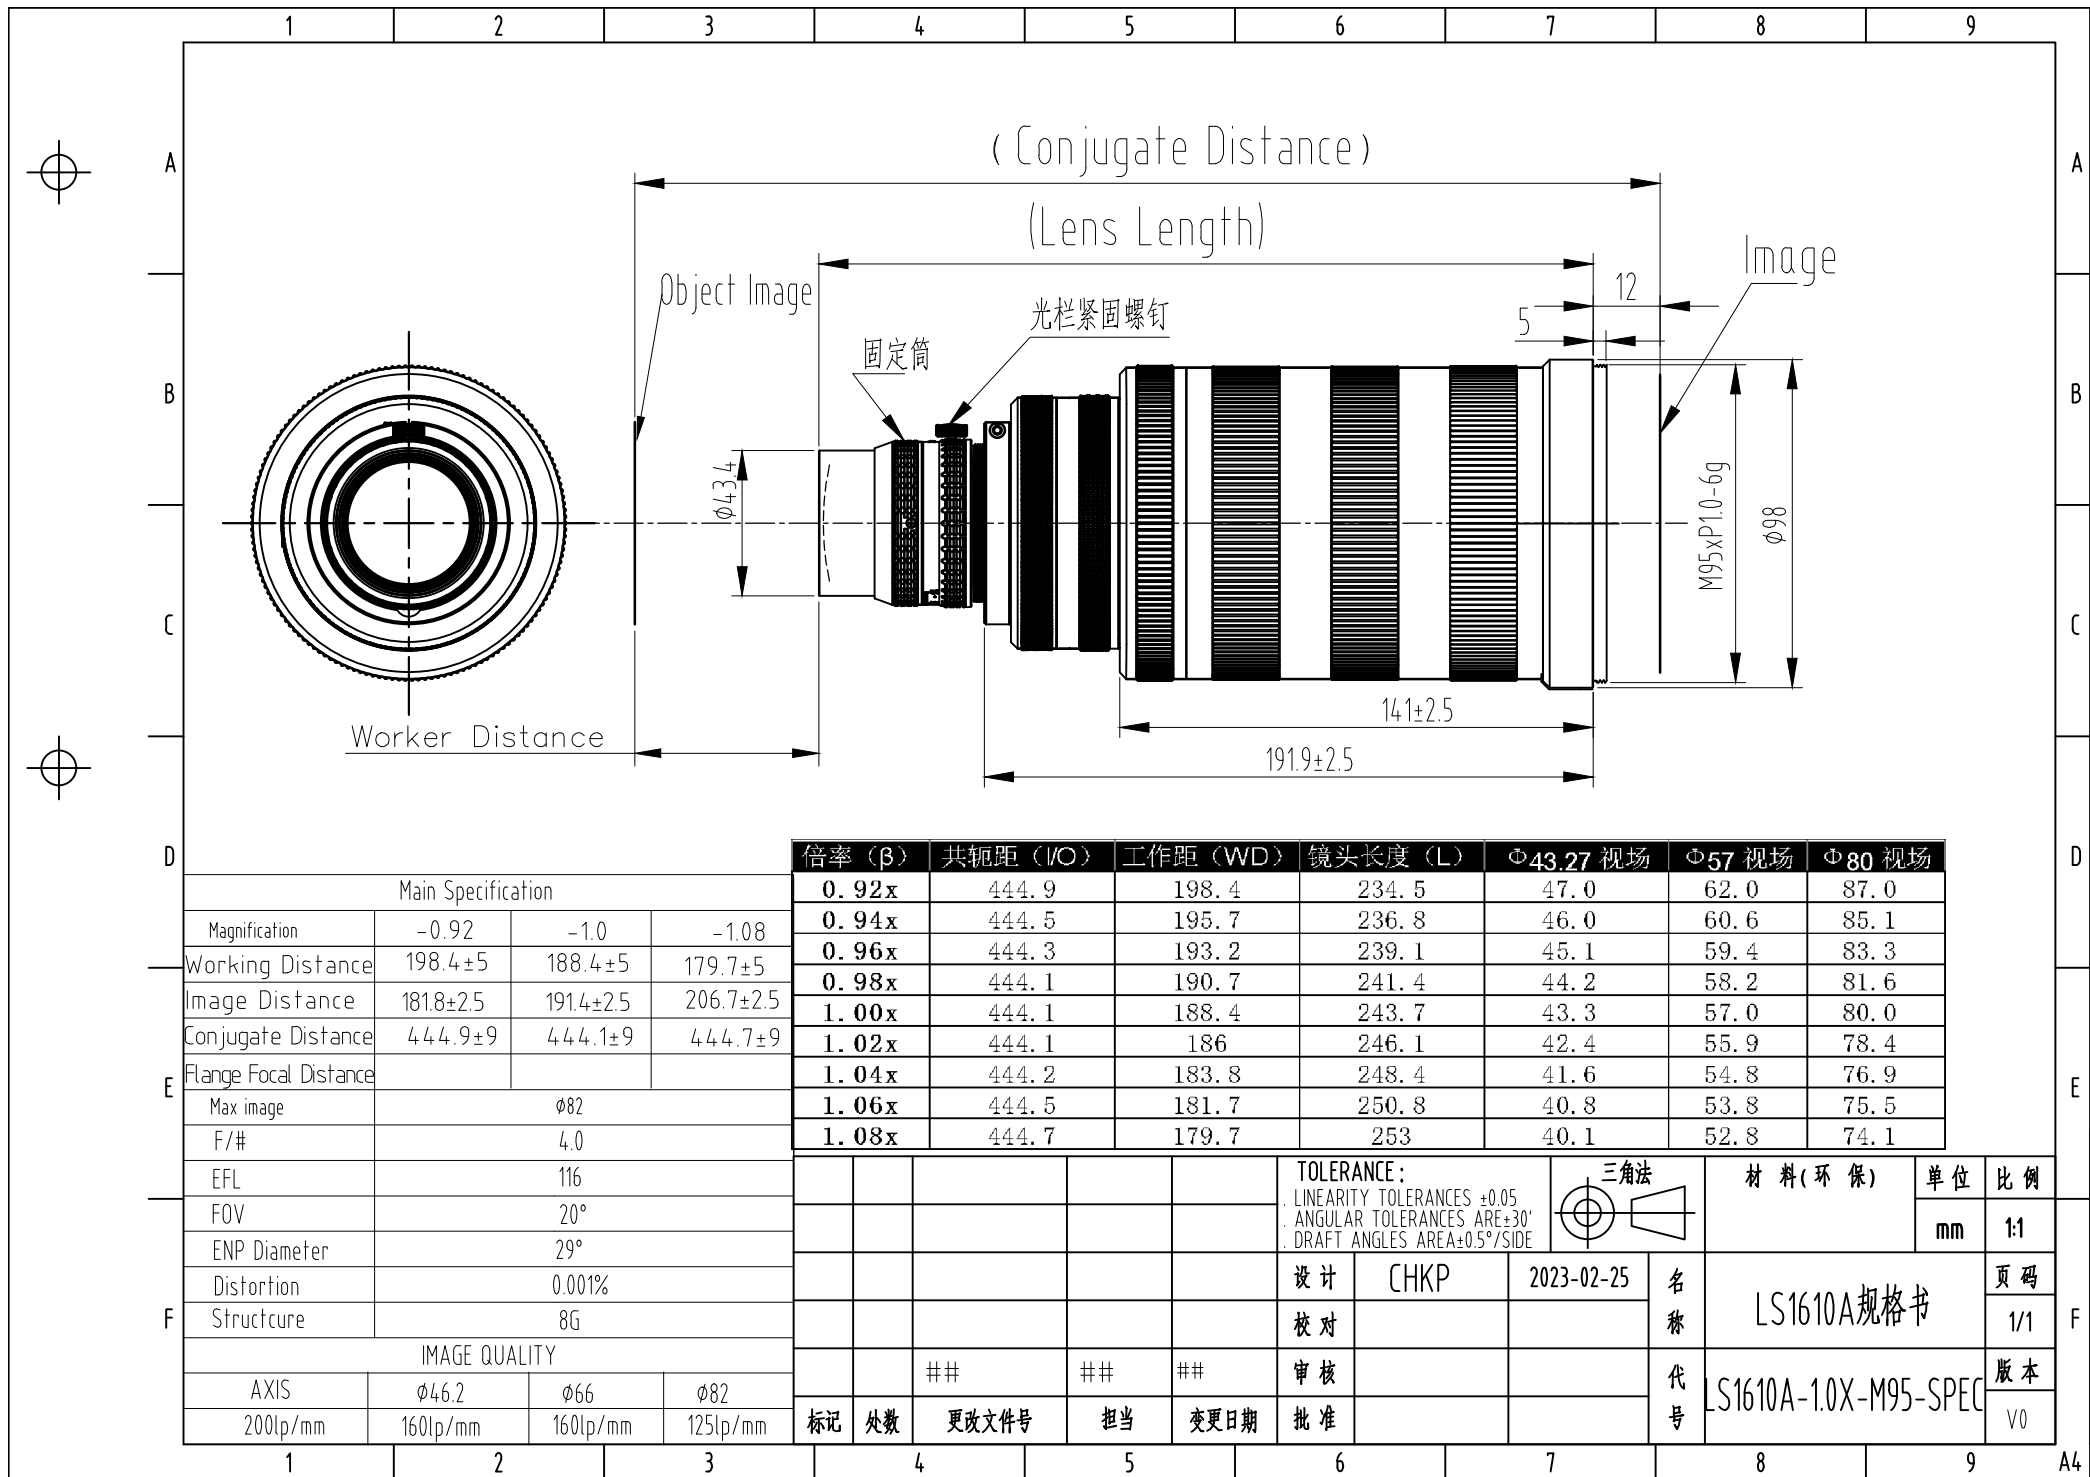

Main Specification				倍率 (β)	共轭距 (I/O)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ80 视场				
Magnification	-0.92	-1.0	-1.08	0.92x	444.9	198.4	234.5	47.0	62.0	87.0				
Working Distance	198.4±5	188.4±5	179.7±5	0.94x	444.5	195.7	236.8	46.0	60.6	85.1				
Image Distance	181.8±2.5	191.4±2.5	206.7±2.5	0.96x	444.3	193.2	239.1	45.1	59.4	83.3				
Conjugate Distance	444.9±9	444.1±9	444.7±9	0.98x	444.1	190.7	241.4	44.2	58.2	81.6				
Flange Focal Distance				1.00x	444.1	188.4	243.7	43.3	57.0	80.0				
Max image	ø82			1.02x	444.1	186	246.1	42.4	55.9	78.4				
F/#	4.0			1.04x	444.2	183.8	248.4	41.6	54.8	76.9				
EFL	116			1.06x	444.5	181.7	250.8	40.8	53.8	75.5				
FOV	20°			1.08x	444.7	179.7	253	40.1	52.8	74.1				
ENP Diameter	29°			TOLERANCE: LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE				三角法		材 料 (环 保)	单 位	比 例		
Distortion	0.001%							设计		mm		1:1		
Structure	8G							CHKP		2023-02-25		名 称	LS1610A规格书	页 码
IMAGE QUALITY								校 对				代 号	LS1610A-1.0X-M95-SPEC	1/1
AXIS	ø46.2	ø66	ø82					审 核						版 本
200lp/mm	160lp/mm	160lp/mm	125lp/mm	标记	处数	更改文件号	担当	变更日期	批 准				V0	