


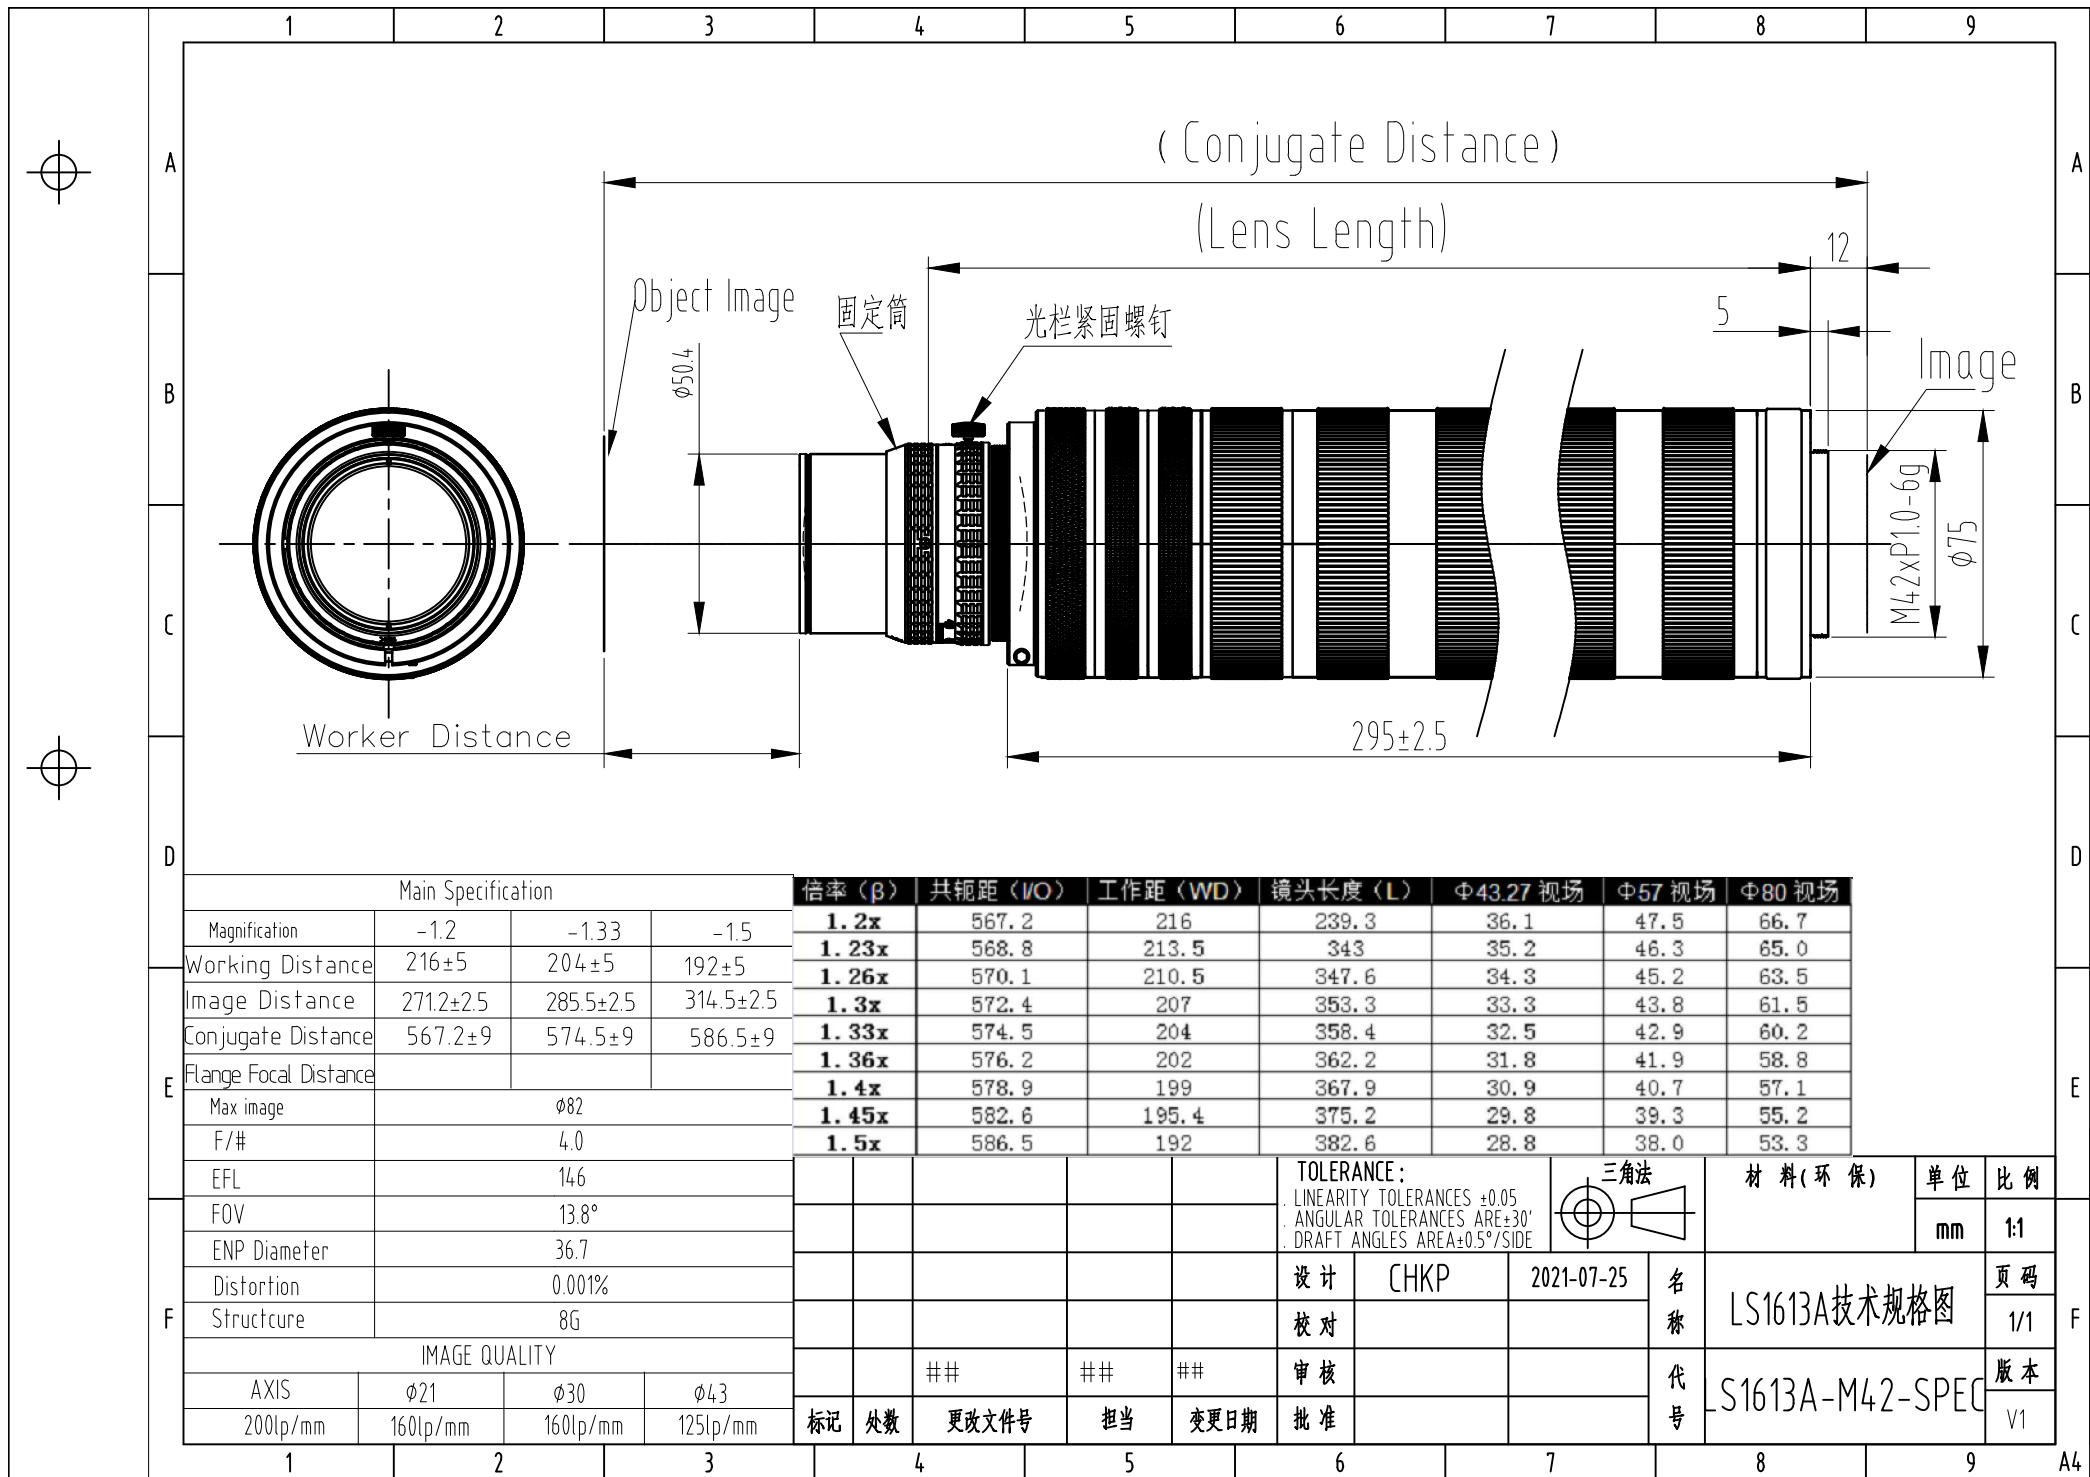

Main Specification			
Magnification	-1.2	-1.33	-1.5
Working Distance	216±5	204±5	192±5
Image Distance	271.2±2.5	285.5±2.5	314.5±2.5
Conjugate Distance	567.2±9	574.5±9	586.5±9
Flange Focal Distance			
Max image	ø82		
F/#	4.0		
EFL	146		
FOV	13.8°		
ENP Diameter	36.7		
Distortion	0.001%		
Structure	8G		
IMAGE QUALITY			
AXIS	ø21	ø30	ø43
200lp/mm	160lp/mm	160lp/mm	125lp/mm

倍率 (β)	共轭距 (WO)	工作距 (WD)	镜头长度 (L)	φ43.27 视场	φ57 视场	φ80 视场
1.2x	567.2	216	239.3	36.1	47.5	66.7
1.23x	568.8	213.5	343	35.2	46.3	65.0
1.26x	570.1	210.5	347.6	34.3	45.2	63.5
1.3x	572.4	207	353.3	33.3	43.8	61.5
1.33x	574.5	204	358.4	32.5	42.9	60.2
1.36x	576.2	202	362.2	31.8	41.9	58.8
1.4x	578.9	199	367.9	30.9	40.7	57.1
1.45x	582.6	195.4	375.2	29.8	39.3	55.2
1.5x	586.5	192	382.6	28.8	38.0	53.3

TOLERANCE:	三角法	材料(环保)	单位	比例
LINEARITY TOLERANCES ±0.05	△		mm	1:1
ANGULAR TOLERANCES ARE±30'				
DRAFT ANGLES AREA±0.5°/SIDE				
设计	CHKP	2021-07-25	名称	LS1613A技术规格图
校对			代号	S1613A-M42-SPEC
审核				版本
批准				V1

标记	处数	更改文件号	担当	变更日期
----	----	-------	----	------