
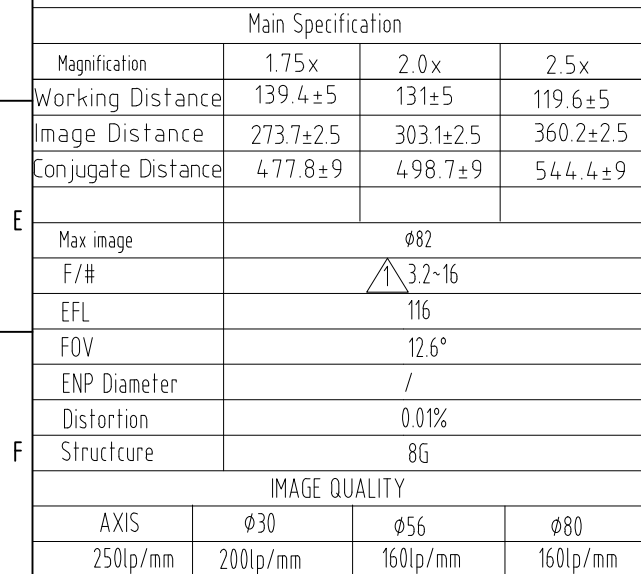




倍率 (β)		共轭距 (I/O)		工作距 (WD)		镜头长度 (L)		Φ43.27 视场		Φ57 视场		Φ80 视场		接口+减		数量	
1.75x		477.8		139.4		326.4		24.7		32.6		45.7		减25mm-M72接口		1pcs	
1.8x		481.6		137.6		332		24.0		31.7		44.4					
1.9x		489.8		134.2		343.6		22.8		30.0		42.1					
2.0x		498.7		131		355.7		21.6		28.5		40.0					
2.1x		507.1		128.4		366.7		20.6		27.1		38.1		加25mm-M72接口		1pcs	
2.2x		516.1		125.9		378.2		19.7		25.9		36.4					
2.3x		525		123.7		389.3		18.8		24.8		34.8					
2.4x		534.4		121.6		400.8		18.0		23.8		33.3					
2.5x		544.4		119.6		412.8		17.3		22.8		32.0		加25mm-M72接口		2pcs	
														加15mm-M72接口		1pcs	

						TOLERANCE: LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES ARE±0.5°/SIDE			<div>三角法</div> 		材 料 (环 保)		单 位	比 例
													mm	1:1
						设计	CHKP	2025-07-09	名称	LS1620B规格书			页 码	
						校对							1/1	
	2	ENG202507090001	CHKP	2025.07.09	审核				代号	LS1620B-M58-SPEC			版 本	
标记	处数	更改文件号	担当	变更日期	批准								V2	