
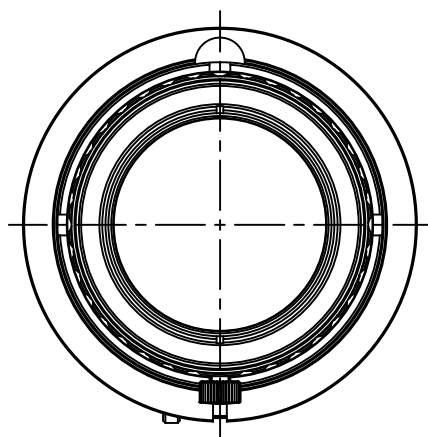
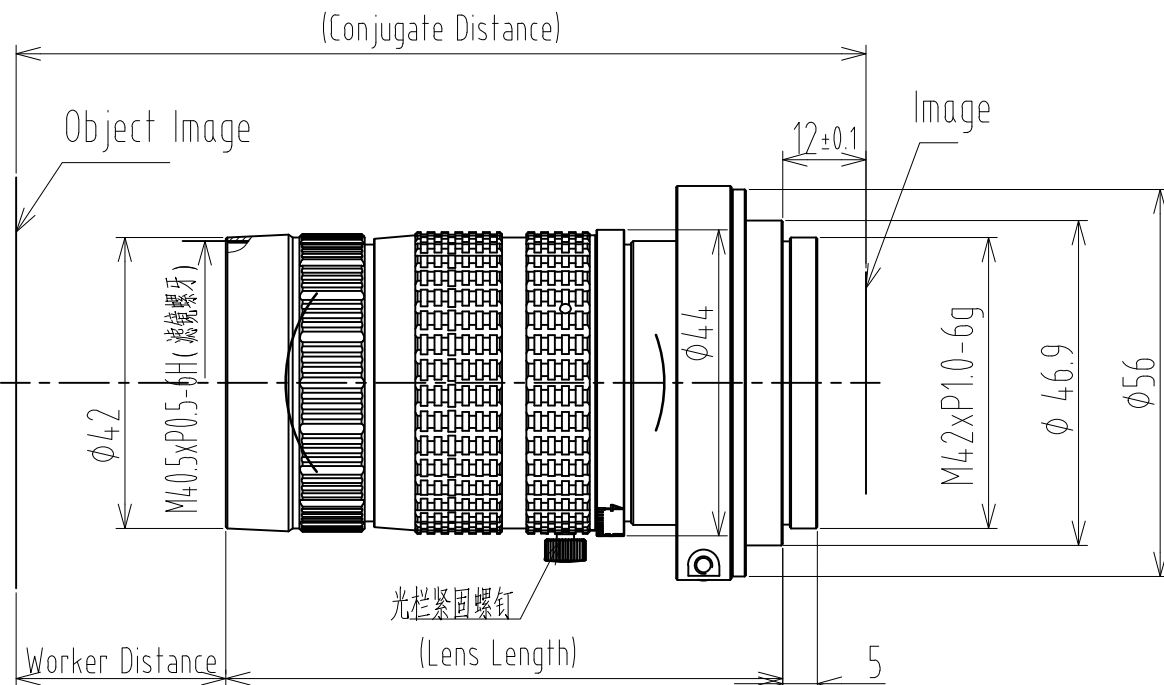




Main Specification				倍率 (β)	共轭距 (VO)	工作距 (WD)	镜头长度 (L)	Φ14 视场	Φ28 视场	Φ32 视场	材 料 (环 保)			单 位	比 例
Magnification	0.015X	0.03X	0.05X	0.015x	1826.4	1740	86.4	933.3	1866.7	2133.3				mm	1:1
Working Distance	1740±5	860±5	520±5	0.018x	1536.5	1450	86.5	777.8	1555.6	1777.8	<div>TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE</div> 	LS2540A规格书	页 码		
Image Distance	27.8±2.5	28.2±2.5	28.7±2.5	0.021x	1326.55	1240	86.55	666.7	1333.3	1523.8				1/1	
Conjugate Distance	1826.4±9	946.8±9	607±9	0.024x	1166.6	1080	86.6	583.3	1166.7	1333.3					
Flange Focal Distance	12mm			0.026x	1086.7	1000	86.7	538.5	1076.9	1230.8					
Max image	Φ32			0.030x	946.8	860	86.8	466.7	933.3	1066.7					LS2540A-0.03X-M42-SPEC
F/#	FNO.4.0~16			0.035x	826.9	740	86.9	400.0	800.0	914.3	V0				
EFL	25			0.04x	732	645	87	350.0	700.0	800.0					
FOV	59°			0.045x	660.2	573	87.2	311.1	622.2	711.1					
ENP Diameter	6.2			0.05x	607.3	520	87.3	280.0	560.0	640.0		名 称			代 号
Distortion	0.1%			设计 CHKP											
Structcure	6G										校 对				
IMAGE QUALITY				审 核											
AXIS	Φ16	Φ21	Φ32								标 记 处 数 更改文件号 担当 变更日期 批 准				
125lp/mm	125lp/mm	100lp/mm	80lp/mm												