
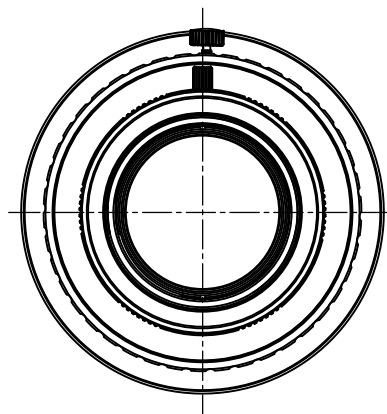
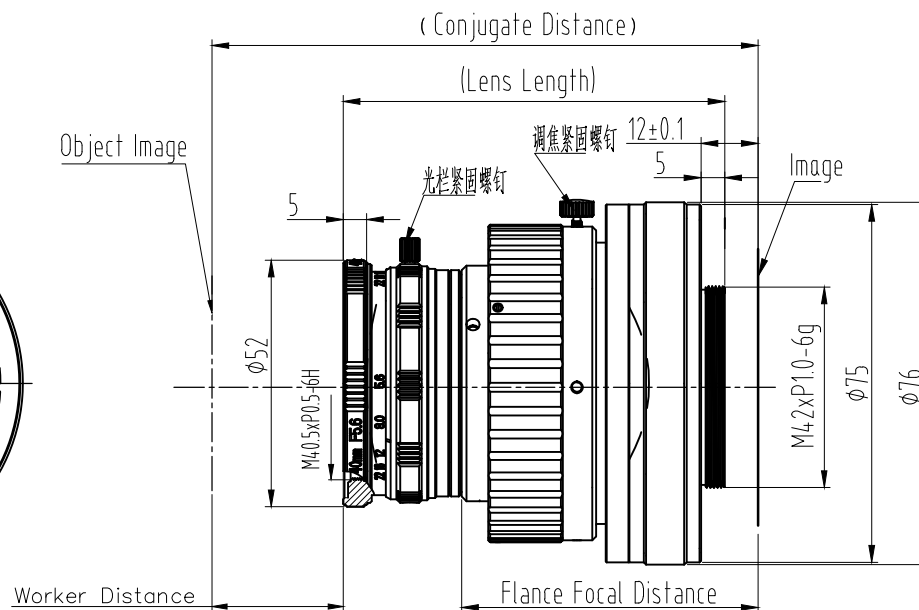




					倍率 (β)	共轭距 (I/O)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ60 视场		
Main Specification					0.02x	2215	2130	73.1	2163.5	2850.0	3000.0		
					0.03x	1516	1430	73.6	1442.3	1900.0	2000.0		
					0.04x	1161	1075	74	1081.8	1425.0	1500.0		
					0.05x	951	865	74.4	865.4	1140.0	1200.0		
Magnification	0.02X	0.05X	0.12X	0.06x	812	725	74.8	721.2	950.0	1000.0			
Working Distance	2130±5	865±5	373±5	0.07x	712	625	75.2	618.1	814.3	857.1			
Image Distance	211±2.5	22.4±2.5	25.3±2.5	0.08x	638	550	75.6	540.9	712.5	750.0			
Conjugate Distance	2215±9	951±9	462±9	0.09x	578	490	76.1	480.8	633.3	666.7			
Flange Focal Distance	12mm				0.10x	530.5	442	76.5	432.7	570.0	600.0		
Max image	Φ60				0.11x	494	405	76.9	393.4	518.2	545.5		
F/#	F5.6~22				0.12x	462	373	77.3	360.6	475.0	500.0		
EFL	41								TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE				材
FOV	69°												
ENP Diameter	/											名称	LS4
Distortion	0.15%								设计	CHKP			
Structcure	8G								校对			代号	LS405
IMAGE QUALITY													
AXIS	Φ21	Φ30	Φ43			##	##	##	审核			批 准	
200lp/mm	200lp/mm	160p/mm	160lp/mm		标记	外数	更改文件号	担当	变更日期				

三角法

材料(环保)

单 位	比 例
mm	1:1

名称

LS4056B技术规格图

代号

LS4056B-0.05X-M58-SPEC

版本	V0
----	----

标记	外数	更改文件号	担当	变更日期
----	----	-------	----	------

批准

号

$$-34V/500 = -0.07A = -70mA$$

V0