
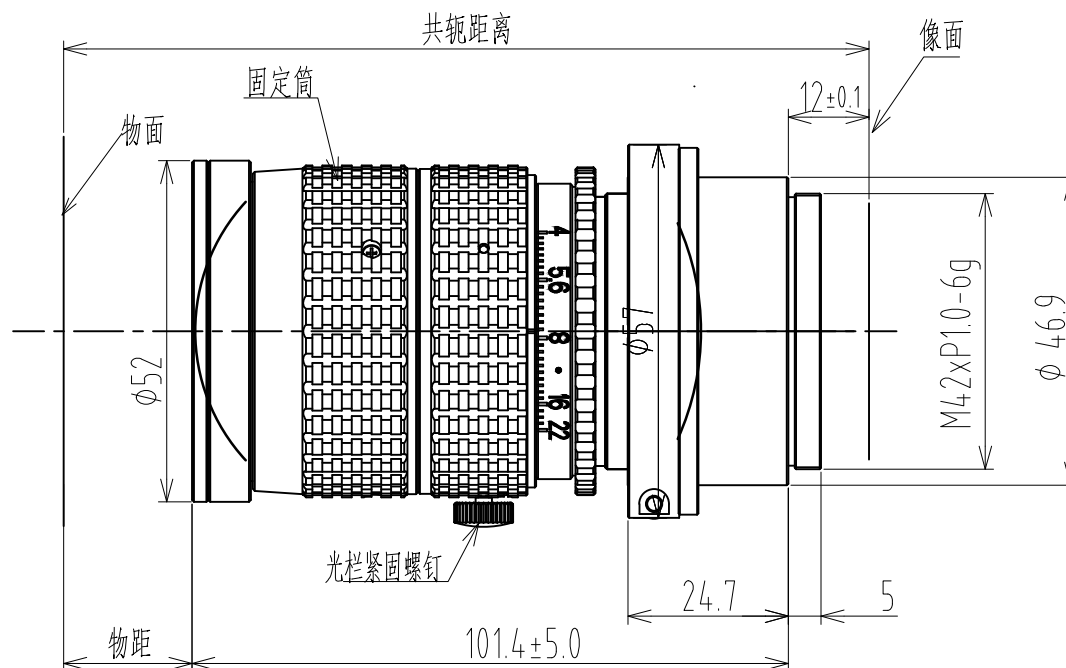




D	Main Specification				倍率 (β)	共轭距 (V)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ60 视场			
					0.1x	621	510	99	432.7	570.0	600.0			
	Magnification	0.1X	0.15X	0.2X	0.11x	581.5	470	99.5	393.4	518.2	545.5			
	Working Distance	510±5	350±5	265±5	0.12x	544	432	100	360.6	475.0	500.0			
					0.13x	512.4	400	100.4	332.8	438.5	461.5			
	Image Distance	28.7±2.5	31±2.5	33.5±2.5	0.14x	487.9	375	100.9	309.1	407.1	428.6			
	Conjugate Distance	621±9	463±9	384±9	0.15x	463.4	350	101.4	288.5	380.0	400.0			
	Flange Focal Distance	12mm			0.16x	442.9	329	101.9	270.4	356.3	375.0			
					0.17x	424.4	310	102.4	254.5	335.3	352.9			
	Max image	ø62			0.18x	408.9	294	102.9	240.4	316.7	333.3			
F/#	FNO.4.0~22			0.19x	394.4	279	103.4	227.7	300.0	315.8				
E	EFL	50							TOLERANCE:			材 料 (环 保)	单 位	比 例
	FOV	57°							LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE ±30' DRAFT ANGLES AREA ±0.5°/SIDE					
	ENP Diameter	11.9							设计	CHKP		名 称	LS5040A规格书	页 码
	Distortion	0.05%							校 对					
	Structure	6G							审 核			代 号	LS5040A-0.15X-M42-SPEC	版 本
F	IMAGE QUALITY						##	##	审 核			代 号	LS5040A-0.15X-M42-SPEC	V0
	AXIS	ø21	ø43	ø62	标记	处数	更改文件号	担当	变更日期	批准				
	125lp/mm	125lp/mm	125lp/mm	100lp/mm										