


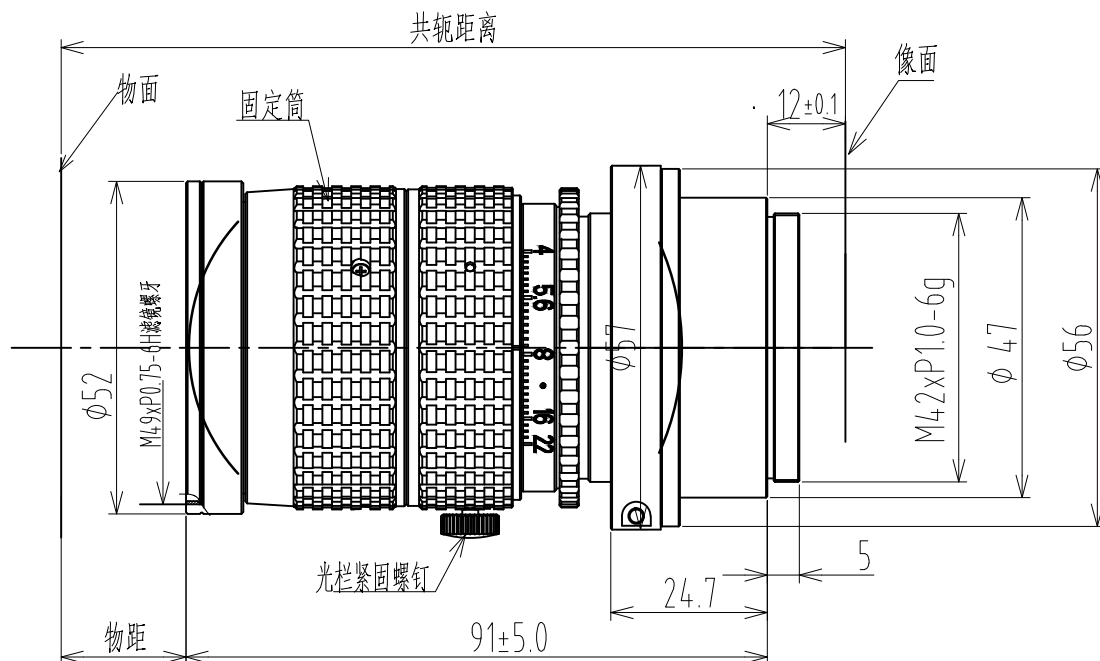

D	Main Specification				倍率 (β)	共轭距 (VO)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ60 视场
	Magnification	0.07X	0.1X	0.13X	0.07x	839.4	735	104.4	618	814	857
	Working Distance	735±5	520±5	405±5	0.075x	794.6	690	104.6	577	760	800
	Image Distance	27.3±2.5	28.8±2.5	30.3±2.5	0.08x	754.9	650	104.9	541	713	750
	Conjugate Distance	839.4±9	625.9±9	512.4±9	0.085x	715.1	610	105.1	509	671	706
	Flange Focal Distance	12mm			0.09x	685.4	580	105.4	481	633	667
	Max image	φ62			0.095x	655.6	550	105.6	455	600	632
	F/#	FNO.4.0~22			0.1x	625.9	520	105.9	433	570	600
	EFL	50			0.11x	581.4	475	106.4	393	518	545
	FOV	59°			0.12x	546.8	440	106.8	361	475	500
E	ENP Diameter	12			0.13x	512.4	405	107.4	333	438	462
	Distortion	0.05%									
	Structure	6G									
	IMAGE QUALITY										
	AXIS	φ21	φ43	φ62							
	125lp/mm	125lp/mm	125lp/mm	100lp/mm							
F											

		材 料 (环 保)	单 位	比 例
			mm	1:1
名 称	LS5040A技术规格图		页 码	
			1/1	
	代 号		版 本	
	LS5040A-0.1X-M42-SPEC		V0	