
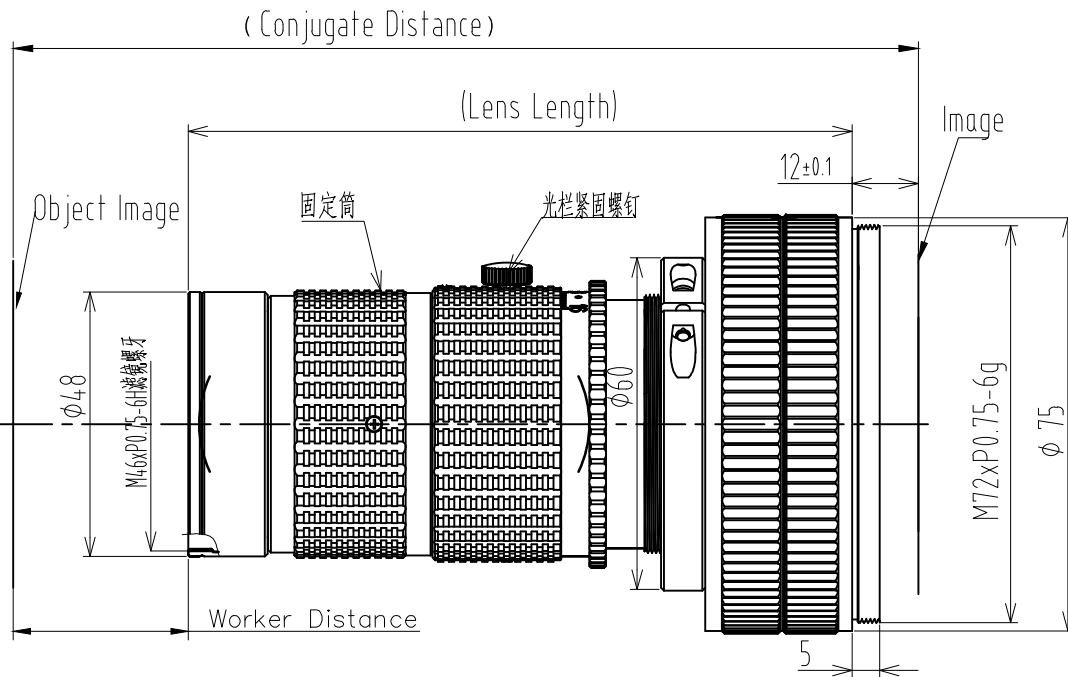




Main Specification				倍率 (β)		共轭距 (V0)		工作距 (WD)		镜头长度 (L)		Φ43.27 视场		Φ57 视场		Φ60 视场		
Magnification	0.1X	0.13X	0.18X	0.1x		1018		880		130.5		432.7		570.0		600.0		
Working Distance	880±5	690±5	520±5	0.11x		948		805		131.3		393.4		518.2		545.5		
Image Distance	37.4±2.5	39.9±2.5	43.9±2.5	0.12x		889		745		132.1		360.6		475.0		500.0		
Conjugate Distance	1018±9	836±9	645±9	0.13x		836		690		132.9		332.8		438.5		461.5		
Flange Focal Distance	12mm			0.14x		793		647		133.7		309.1		407.1		428.6		
				0.15x		755		608		134.5		288.5		380.0		400.0		
				0.16x		720		573		135.3		270.4		356.3		375.0		
Max image	φ64			0.17x		691		543		136.2		254.5		335.3		352.9		
F/#	4.0			0.18x		645		520		136.9		240.4		316.7		333.3		
EFL	82									TOLERANCE: LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES ARE±0.5°/SIDE				材 料 (环 保)		单 位	比 例	
FOV	36°															mm	1:1	
ENP Diameter	19.1									设计		CHKP		名称		LS8040A规格书		页 码
Distortion	<0.1%																	校 对
Structure										审 核				代号		LS8040A-0.13X-M72-SPEC		版 本
IMAGE QUALITY						##		##										##
AXIS	φ21	φ43	φ62	标记	处数	更改文件号		担当	变更日期									
160lp/mm	160lp/mm	160lp/mm	120lp/mm															