
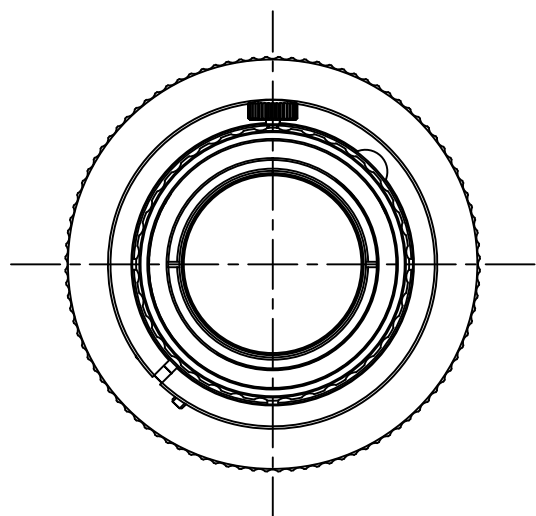


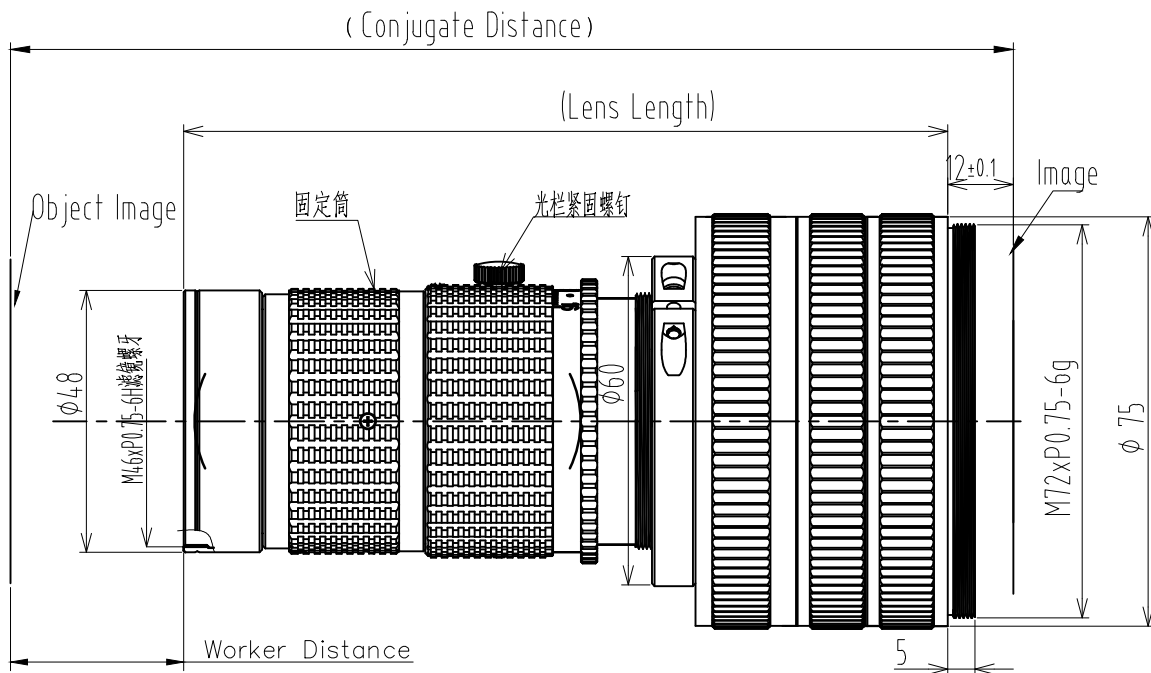

Main Specification				倍率 (β)	共轭距 (WO)	工作距 (WD)	镜头长度 (L)	Φ43.27 视场	Φ57 视场	Φ60 视场				
Magnification	0.2X	0.25X	0.375X	0.2x	608.2	460	136.2	216.4	285	300				
Working Distance	460±5	385±5	276.3±5	0.21x	595.7	447	136.7	206	271.4	285.7				
				0.22x	578.5	429	137.5	196.7	259.1	272.7				
Image Distance	44±2.5	48±2.5	58.1±2.5	0.23x	563.4	413	138.4	188.1	247.8	260.9				
Conjugate Distance	608.2±9	536.9±9	438.3±9	0.25x	536.9	385	139.9	173.1	228	240				
Flange Focal Distance	12mm			0.27x	513.6	360	141.6	160.3	211.1	222.2				
				0.3x	486	330	144	144.2	190	200				
Max image		φ64		0.32x	470.7	313	145.7	135.2	178.1	187.5				
F/#	4.0			0.35x	452	292	148	123.6	162.9	171.4				
				0.375x	438.3	276.3	150	115.4	152	160				
EFL		81					TOLERANCE:		三角法		材 料 (环 保)	单 位	比 例	
FOV		32°					LINEARITY TOLERANCES ±0.05					mm	1:1	
ENP Diameter		19.3					ANGULAR TOLERANCES ARE ±30°							
Distortion		<0.02%					设计	CHKP			名 称	LS8040A规格书		页 码
														1/1
Structure	6G						校 对				代 号	LS8040A-0.25X-SPEC		版 本
														V0
IMAGE QUALITY														
AXIS	φ21	φ43	φ62		##	##	##	审 核						
160lp/mm	160lp/mm	160lp/mm	120lp/mm	标 记	处 数	更改文件号	担当	变更日期	批 准					