


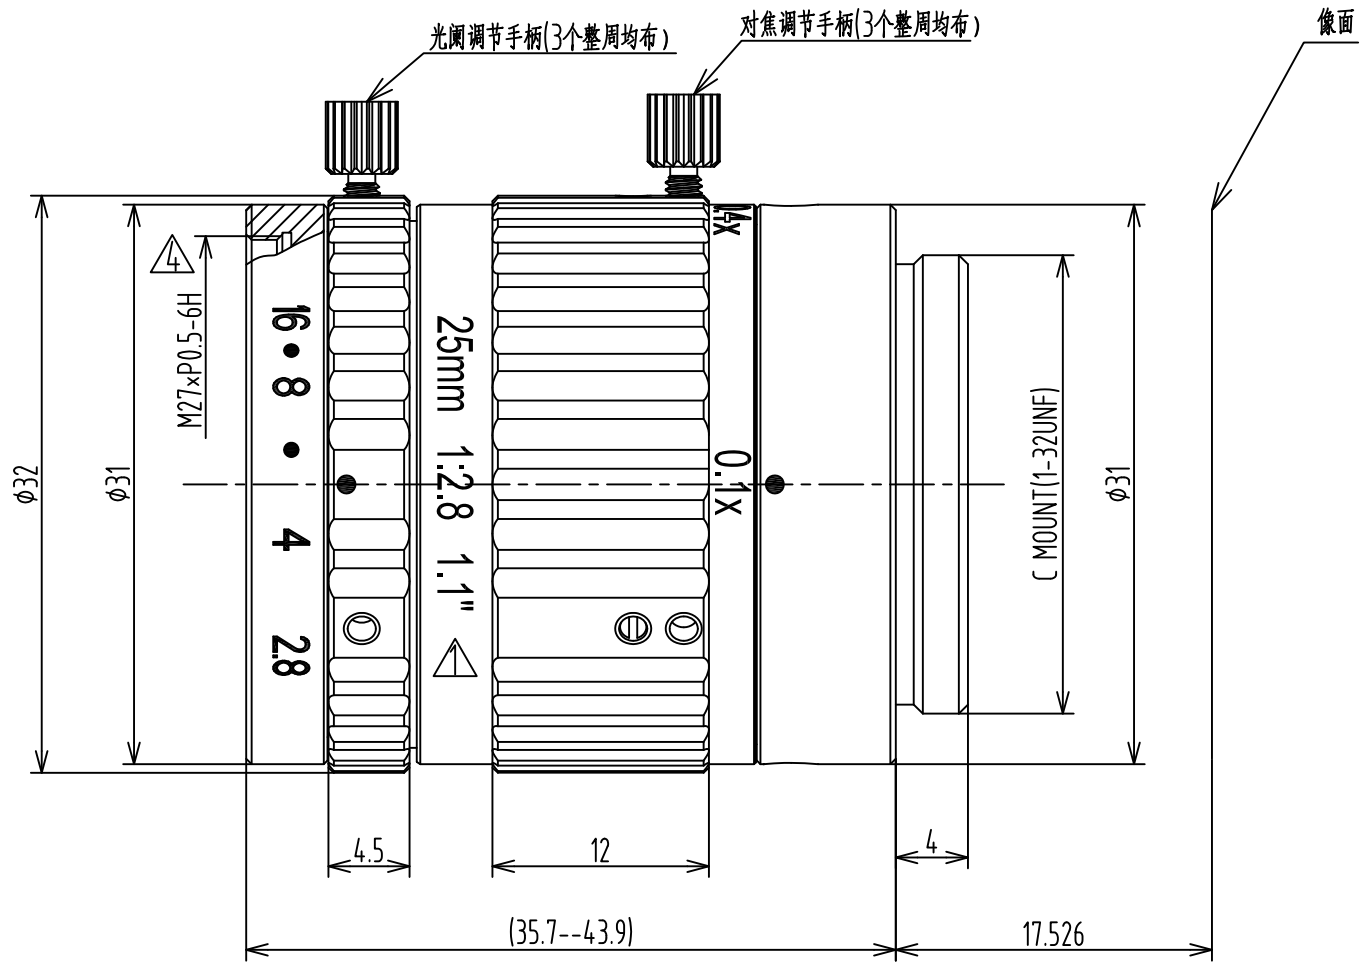

1.1" F 1:2.8 /25C Mount

1.1" F 1:2.8 /25C Mount							
EFL		25mm					
F No.		2.8~16(±10%)					
Flange back		17.526mm					
Mount		C-Mount					
O/I		126~314.1mm					
Distortion (TV)		<0.07%					
Storage Temperature Range		-20~+60℃					
Working distance	Optical Magnification			FOV(mm)			
		1.1"(φ17.6)		1"(φ16)		2/3" (φ11)	
		H	V	H	V	H	V
 65	-0.4X	35	26	32	24	22	16.5
74.4	-0.35X	40	30	35.6	27.4	25	18.8
85.4	-0.3X	47	35	42.6	32	29	22
103.4	-0.25X	56	42	51	38	35	26
125.4	-0.2X	70	52.8	64	48	44	33
173.4	-0.15X	93	70	85	64	58.6	44
260.4	-0.1X	140	105	128	96	88	66

					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30° DRAFT ANGLES AREA±0.5°/SIDE			材 料(环 保)	单 位	比 例	
									mm	2.5:1	
					设 计			名 称	MC2510A规格书		页 码
					校 对						1/1
					审 核			代 号	MC2510A-SPEC		版 本
标 记	处 数	更改文件号	担 当	变更日期	批 准						V0