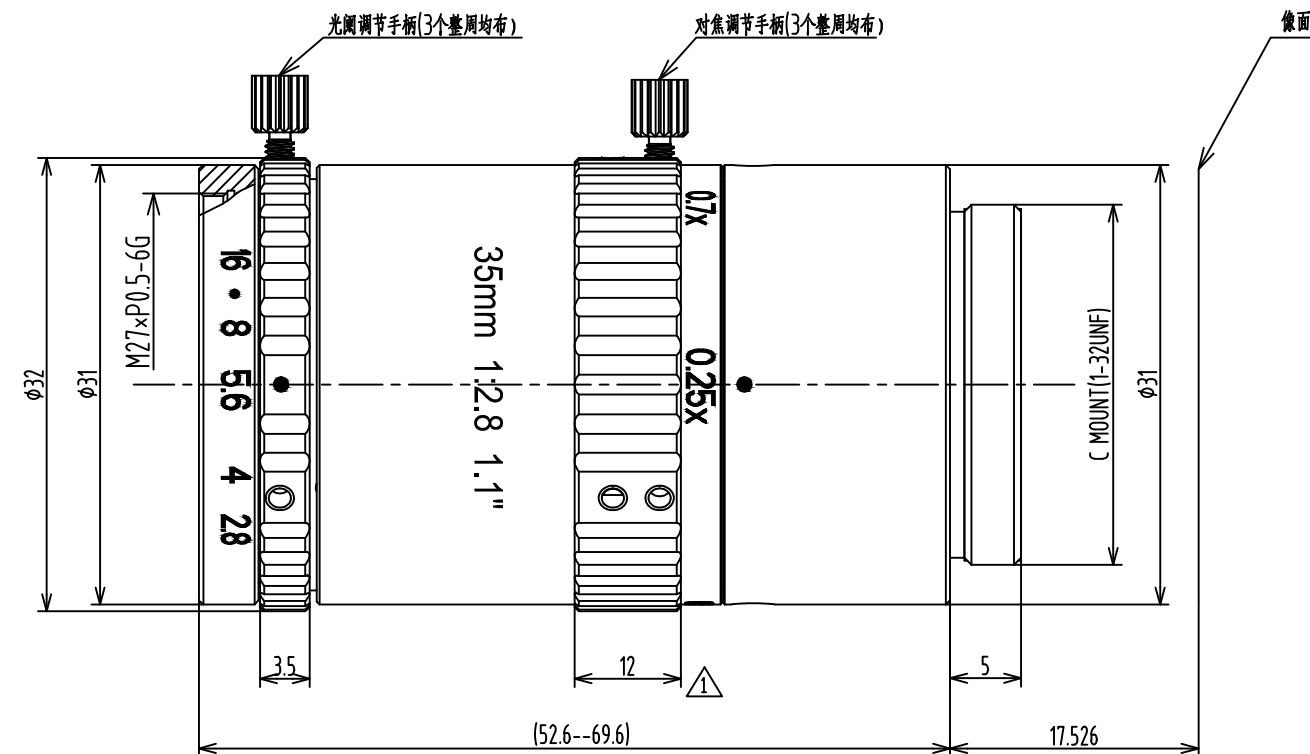


	1		2		3			
A								
B								
C								
	1.1" F 1:2.8 /35 C Mount							
	EFL		35mm					
	F No.		2.8~16(±10%)					
	Flange back		17.526mm					
	Mount		C-Mount					
D	O/I		145.3~220.6mm					
	Distortion (TV)		<0.05%					
	Storage Temperature Range		-20~+60℃					
	Working distance	Optical Magnification			FOV(mm)			
			1.1"(φ17.6)		1"(φ16)		2/3" (φ11)	
			H	V	H	V	H	V
E	59	-0.7X	20.1	15	18.2	13.7	12.6	9.5
	63	-0.65X	21.6	16.2	19.6	14.7	13.6	10.2
	67	-0.6X	23.4	17.6	21.3	16	14.8	11.1
	73	-0.55X	25.6	19.2	23.2	17.4	16.1	12.1
	78	-0.5X	28.1	21.1	25.6	19.2	17.6	13.3
	87	-0.45X	31.2	23.4	28.4	21.3	19.7	14.8
F	97	-0.4X	35.2	26.4	32	24	22.2	16.6
	110	-0.35X	40.2	30.1	36.5	27.4	25.3	19
	125	-0.3X	46.9	35.2	42.6	32	29.6	22.2
	150	-0.25X	56.3	42.2	55.6	41.7	38.6	28.9
	1		2		3			

[illegible]