
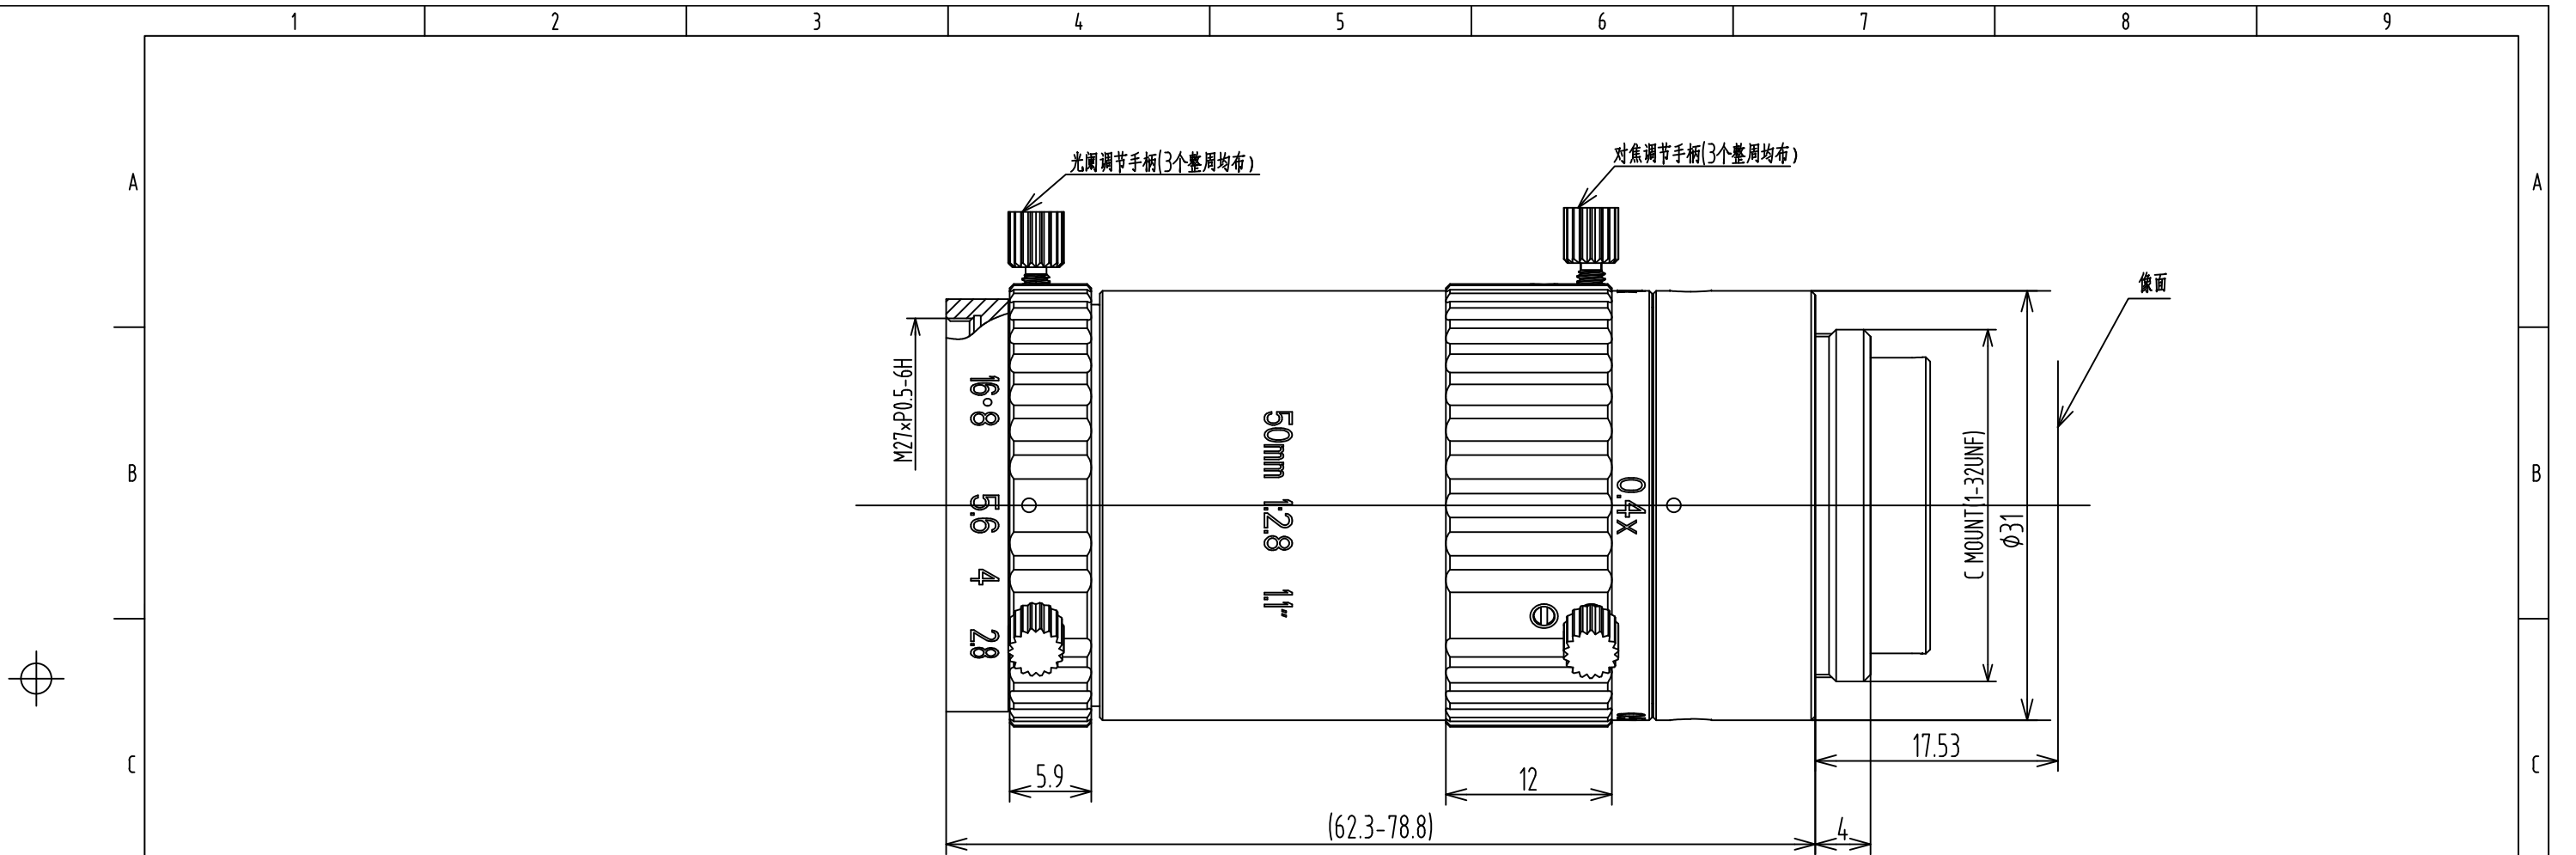




1.1" F 1:2.8 /50 C Mount							
EFL		50mm					
F No.		2.8~16(±10%)					
Flange back		17.526mm					
Mount		C-Mount					
O/I		191.4~215.9mm					
Distortion (TV)		<0.05%					
Storage Temperature Range		-20~+60℃					
Working distance	Optical Magnification			FOV(mm)			
		1.1"(φ17.6)		1"(φ16)		2/3" (φ11)	
		H	V	H	V	H	V
95.4	-0.8X	17.5	13	15.9	11.9	11	8.2
99.4	-0.75X	18.6	14	16.9	12.7	11.7	8.8
103.4	-0.7X	20	15	18.2	13.6	12.6	9.4
109.4	-0.65X	21.5	16.1	19.6	14.7	13.6	10.2
115.4	-0.6X	23.3	17.6	21.2	15.9	14.7	11
123.4	-0.55X	25.5	19.1	23.1	17.3	16	12
132.4	-0.5X	28	21	25.4	19	17.6	13.2

					TOLERANCE: LINEARITY TOLERANCES ± 0.05 ANGULAR TOLERANCES ARE $\pm 30^\circ$ DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE			三角法	材料(环保)	单位	比例
										mm	2:1
					设计			名称	MC5010B规格书		页码
					校对						1/1
					审核			代号	MC5010B-SPEC		版本
标记	处数	更改文件号	担当	变更日期	批准						V0