
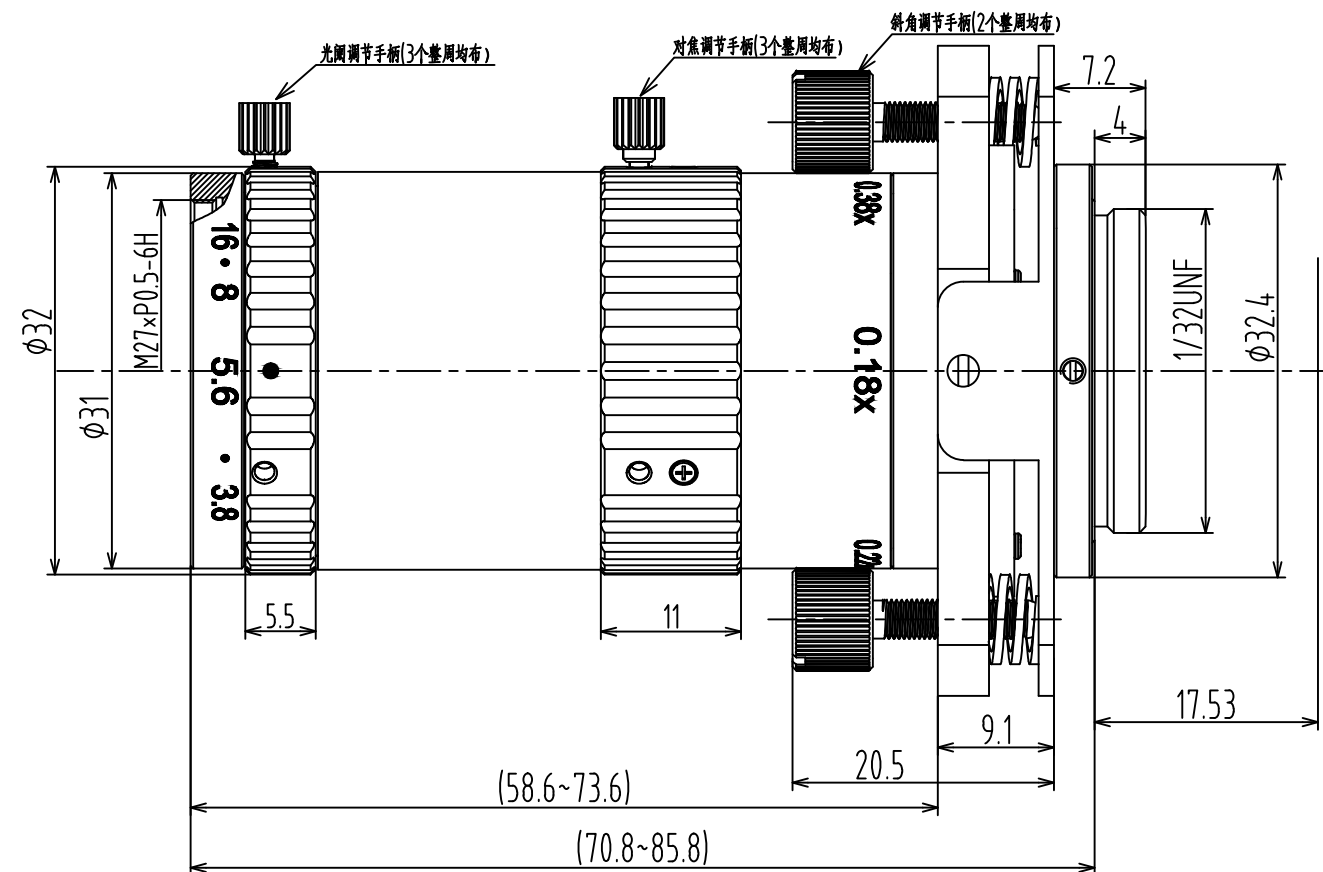




1.1" F 1:3.8 /75 C Mount								
EFL		75mm						
F No.		3.8~16(+10%)						
Flange back		17.526mm						
Mount		C-Mount						
O/I		357~557mm						
Distortion (TV)		<0.05%						
Dip Angle(max)		±6.5°(max)						
Storage Temperature Range		-20~+60℃						
Working distance	Optical Magnification			FOV(mm)				
		1.1"(φ17.6)		1"(φ16)		2/3" (φ11)		
		H	V	H	V	H	V	
257	-0.38X	37.05	27.78	33.68	25.26	23.15	17.36	
282	-0.337X	41.78	31.33	37.98	28.48	26.11	19.58	
307	-0.302X	46.62	34.96	42.38	31.78	29.13	21.85	
332	-0.274X	51.38	38.54	46.71	35.03	32.11	24.08	
357	-0.25X	56.32	42.24	51.2	38.4	35.2	26.4	
382	-0.231X	60.95	45.71	55.41	41.55	38.09	28.57	
407	-0.214X	65.79	45.71	59.81	44.85	41.12	30.84	
432	-0.2X	70.4	52.8	64	48	44	33	
457	-0.186X	75.69	56.77	68.81	51.61	47.31	35.48	
471	-0.18X	78.22	58.66	71.11	53.33	48.88	36.66	

					TOLERANCE: LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE			三角法	材料(环保)	单位 mm	比例 2:1
					设计			名称	SAM7510A规格书		页码
					校对						1/1
					审核						版本
标记	处数	更改文件号	担当	变更日期	批准			代号	SAM7510A-SPEC		V0