


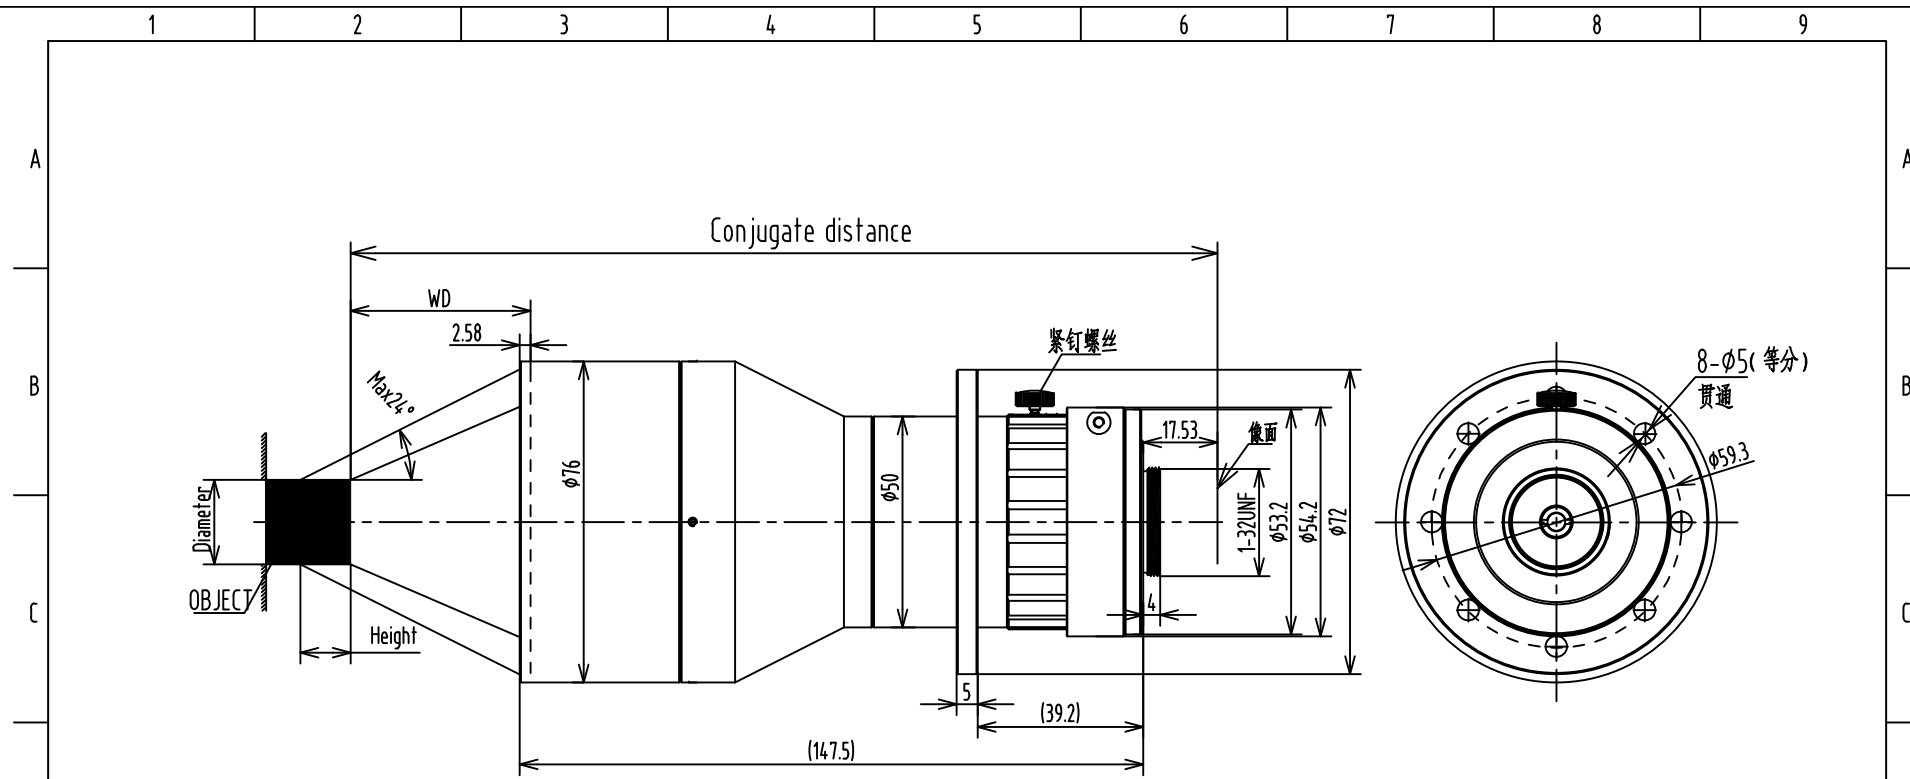

$$c(\%) = \frac{\text{Top view diameter (px)}}{\text{Detector short side (px)}} \times 100$$

E	Detector Type		1/2"	
	Field of view (Diam×Height)	SPEC	Diameter	Height
		Min	5	5
		Typical	20	20
		Max	40	13
F	Wavelength Range	450-650		
	Working Distance	12-66		
	F/#	8.0-22		
	Mount	C-mount		

Diameter	Height	WD	F/#	Height	WD	Height	WD
5	5	66	12				
10	10	54	12	20	44	30	34
15	10	47	8.0	20	37	30	27
20	10	41	8.0	20	31	30	21
25	10	35	8.0	20	25	30	15
30	10	29	8.0	20	19	27	12
35	10	22	8.0	20	12	20	12
40	10	15	8.0	13	12	13	12

TOLERANCE:				三角法	材料(环保)	单位	比例
LINEARITY TOLERANCES ±0.05							
ANGULAR TOLERANCES ARE±30'							
DRAFT ANGLES AREA±0.5°/SIDE							
设计			名称	360环外测镜头	页码		
校对							
审核							
批准							
			代号	WBHX3610A-SPEC	版本		
					V0		

1	2	3	4	5	6	7	8	9	A4
---	---	---	---	---	---	---	---	---	----