
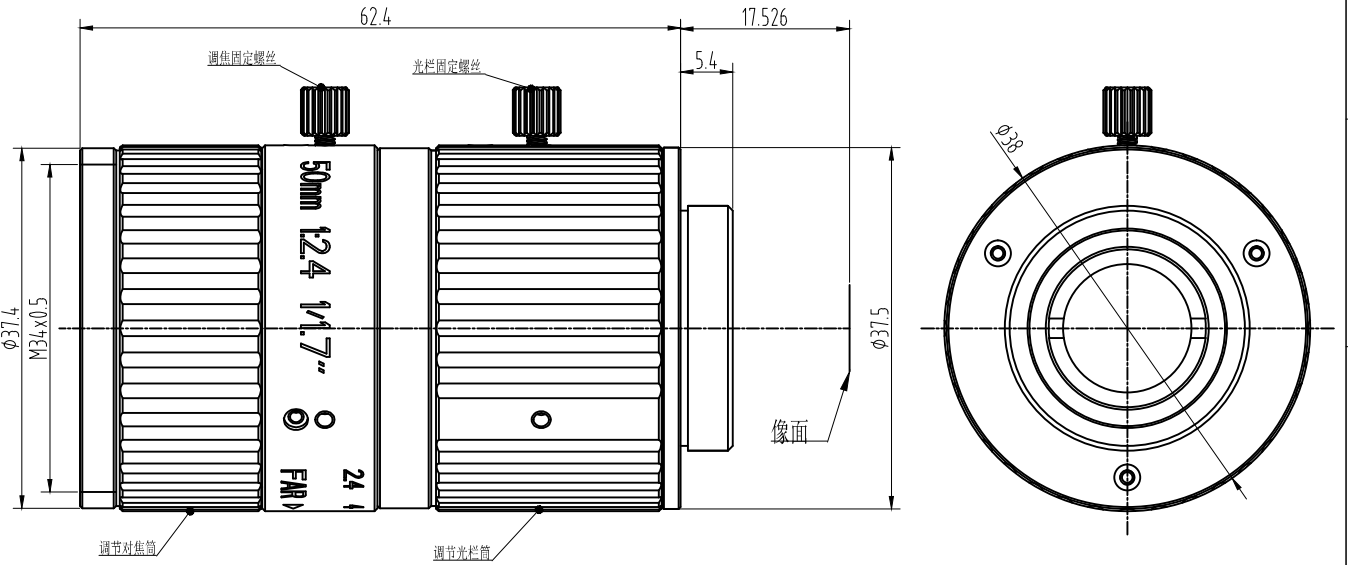


1/1.7" F2.4 / 16 12Mega C Mount				
EFL		f=50mm		
F.NO		F=2.4~16		
Flange Back		17.526mm in air		
Focus Distance(mim)		0.3m		
TV Distortion		<0.1%		
CHIEF RAY ANGLE		3.8Å		
Relative Illumination		95%		
Filter Screw Size		M34x0.5		
Magnification range		0.239 ~ ∅		
Working distance range		250mm~ ∅		
Angle (∅)		H	9.6Å	
		V	7.3Å	
		D	12Å	
Object Dimension at 250mm		H	31.1mm	
		V	23.5mm	
		D	39mm	
Working Distance	Optical Magnification	1/ 1.7" Field Of View (7.44mm x5.62mm)		
mm		H	V	D
1000	0.048	156.7	118.3	196.5
900	0.053	140.0	105.7	175.5
800	0.060	123.2	93.0	154.5
700	0.070	106.5	80.4	133.5
650	0.076	98.1	74.1	123.0
600	0.083	89.7	67.8	112.5
550	0.092	81.4	61.4	102.0
500	0.102	73.0	55.1	91.5
450	0.115	64.6	48.8	81.0
400	0.132	56.2	42.5	70.5
350	0.156	47.9	36.1	60.0
300	0.189	39.5	29.8	49.5
250	0.239	31.1	23.5	39.0
200	---	---	---	---
150(+接圈2.5)	---	---	---	---

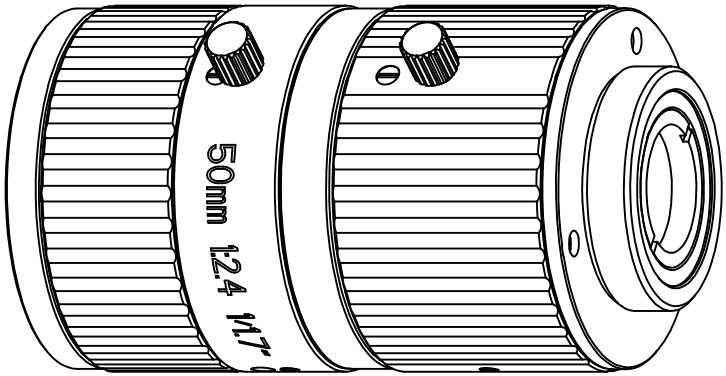

common	tolerance	3				Unit	mm	Part Name	50mm
Angle	±0.5Å	2				Scale			
0.000	±0.01	1				Version		Dwg No	FA5017A
0.00	±0.03	No.	Mark	File No	Autograph	Date	Property of Qiang Sheng Jing Mi Optical Technology Co., Ltd, Unauthorized Use, Reproduction or Disclosure Is Strictly Prohibited		
0.0	±0.05	Drawing		Date					
0	±0.1	Checked		Date					
		Approved		Date					